



ONE-STOP

DIE MAKING MACHINERY ACCESSORIES
TECHNICAL AND TRAINING OUTPUT



YITAI PRECISION MACHINERY

Office: No.191,Huangpujiang(S)Road,Kunshan City 215300,Jiangsu Province,China

Laser Factory: Hongzhu Yongqi Technipark Building E,Jiuwei Village,Xixiang Town,Baoan Zone,Shenzhen City

Wood Factory: Juanli Village,Yitang Town,Lanshan Zone,Linyi,Shandong,China

Tel(What's App): +86-15806261086

Fax: +86-512-57282189

Website: www.ytdiemaker.com

Email: sales_diemaking@yitaipacking.com



LASER CUTTING MACHINE
DIE MAKING MACHINERY
FLAT&ROTARY DIE MAKING MATERIALS

CONTENTS

COMPANY PROFILE

ABOUT US	01
Corporate Culture	02
Certificates	03
Headquarters	04

LASER CUTTING MACHINE

Flat and Rotary Laser Cutting Machine YTX Series	05-06
Rotary Laser Cutting Machine YT83 Series	07-08
Flat Laser Cutting Machine YT48 Series	09-10
Laser Cutting Machine YT46F-40/60	11-12
Cross Table Laser Cutting Machine YT46C-40/60	13-14
Laser Engraving Machine YT43-8/15	15
CO2 Laser Machine YT45-15	16

DIE MAKING MACHINERY

CNC Rotary Router YTR8	17-18
Sandwich Die Routing Machine YS1290	19-20
Water Jet Machine YW5010	21-22
Pertinax Cutting Machine YD1100	23-24
Auto Bending Machine B3-CBN	25-26
Rotary Bending Machine BR1	27-28
Laser Source JCN SERIES/JCW SERIES	29
Die Making Materials	30
Die Making Tools	31-32
Laser Cutting Sample	33-34
Our Professional Team	35
Your Success is Our business	36
Global Presence®ional Support	37-38

ABOUT US



Office: NO.191, Huangpujiang(S) Road, Kunshan City 215300, Jiangsu Province, China

Laser Factory : Hongzhu Yongqi Technipark Building E, Jiuwei Village,

Xixiang Town, Baoan Zone, Shenzhen City

Wood Factory: Juanli Village, Yitang Town, Lanshan Zone, Linyi, Shandong, China

Tel(What's App): +86-15806261086

Tel: +86-512-57282189

Website: www.ytdiemaker.com

E-mail: Molly.xu@yitaipacking.com

COMPANY PROFILE

YITAI PRECISION MACHINERY was established in 2003, which belongs to Taiwan Grandcorp Group. YITAI PRECISION MACHINERY is professional in manufacturing laser cutting machine, flat&rotary die board, die cutting & creasing rule, and providing other related die making materials and machines. We have been in die making industry for over 10 years and our products have been exported to North America, South Asia, Australia, South America, Africa and other regions. we also have many distributors and partners in overseas. Our company is committed to providing one-stop service solutions for packaging, printing and die making enterprises.

CORPORATE CULTURE

Customer satisfaction

Supplier satisfaction



Building equipment and relationship for life

Harmonious social relations

Enterprises that live in harmony with nature

Common development of the company and employees

Certifications

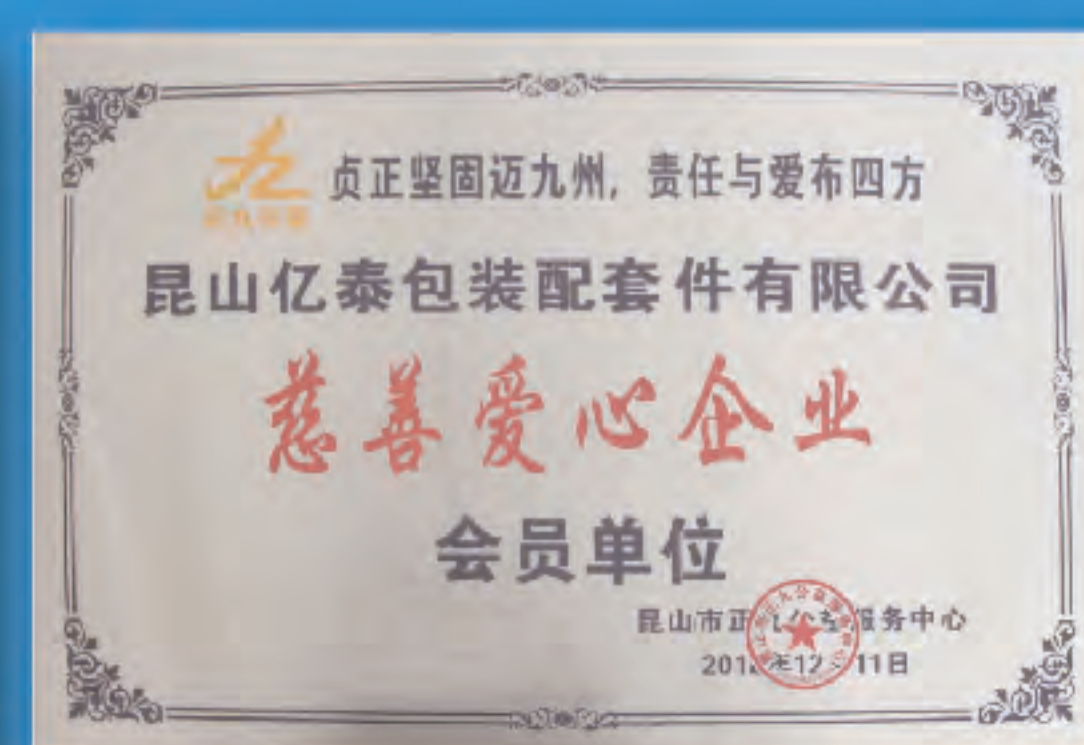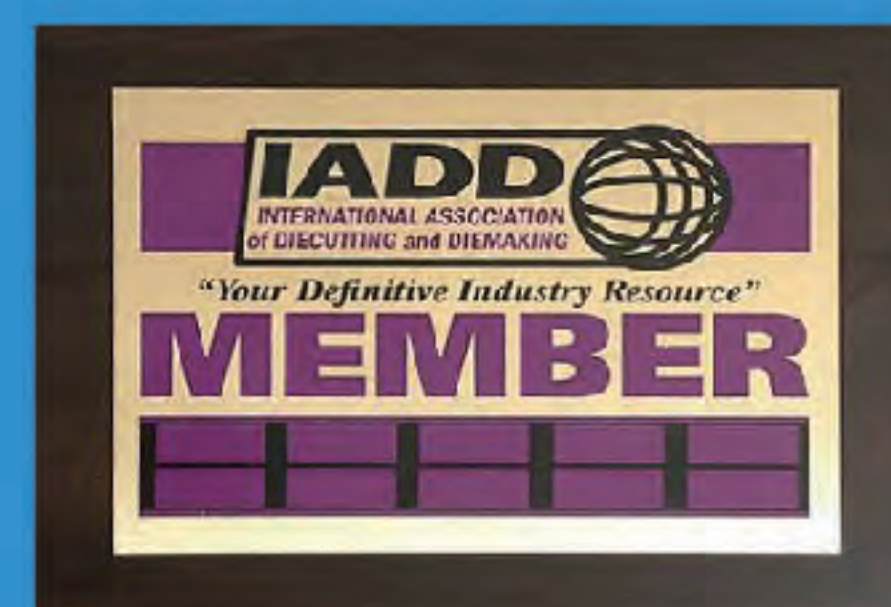

Our Headquarter Office

3000m²+

Headquarters
Office Space

20 Minutes

to Shanghai
Downtown
by Fast Train

1.5 H

to Shanghai
Pudong
International
Airport

Location

Complete Supplying
Chain for Industrial
Zone in Kunshan



Flat and Rotary Laser Cutting Machine YTX Series



Features and Functions

The structure of gantry with small size is stable and reliable.

PA laser dedicated CNC system, lasers and machine control system into one.

The machine equipped with CAD/CAM dedicated automatic programming software, which is to facilitate the production of graphics, programming and maximize the conservation of raw materials, and special cutting process features.

The machine uses fully-enclosed cover, the effect of removing smoke is very good, 100% no smoke left in the workshop when cutting.

The machine is with enclosed optical path, uses positive pressure to remove the dust, which can ensure the lens life.

The three cutting gases are free to choose. The entire system uses high pressure gas line design, when cut stainless steel plate.

Stainless steel plate cover can bear at least two weighted 80kg men standing on it, no deformation.

Eccentric shaft of rotary bed, scientific protection of the axis to avoid high temperature deformation.



Quick marking function is optional.

Drilling router function is optional.

Technical Parameters

Model No	YTX Series
Machine Construction	Gantry construction
Laser output power	High power axial flow CO2 laser source
X-axis travel	2500mm
Y-axis travel	1200mm
Z-axis travel	120mm
Max.Cutting Size	170~800*3000mm
Re-Positioning Precision	≤0.02mm
Control System	Germany PA
Transmission system	Ball screw & Linear guide (TAIWAN)
Drive System	Japan YASKAWA high-precision servo motors
Optical system	US
Chilling System	Made in China
Laser generator gas matched	He, N2, CO2 (99.999%)
Laser cutting thickness	0.1-30mm

Machine Required Space

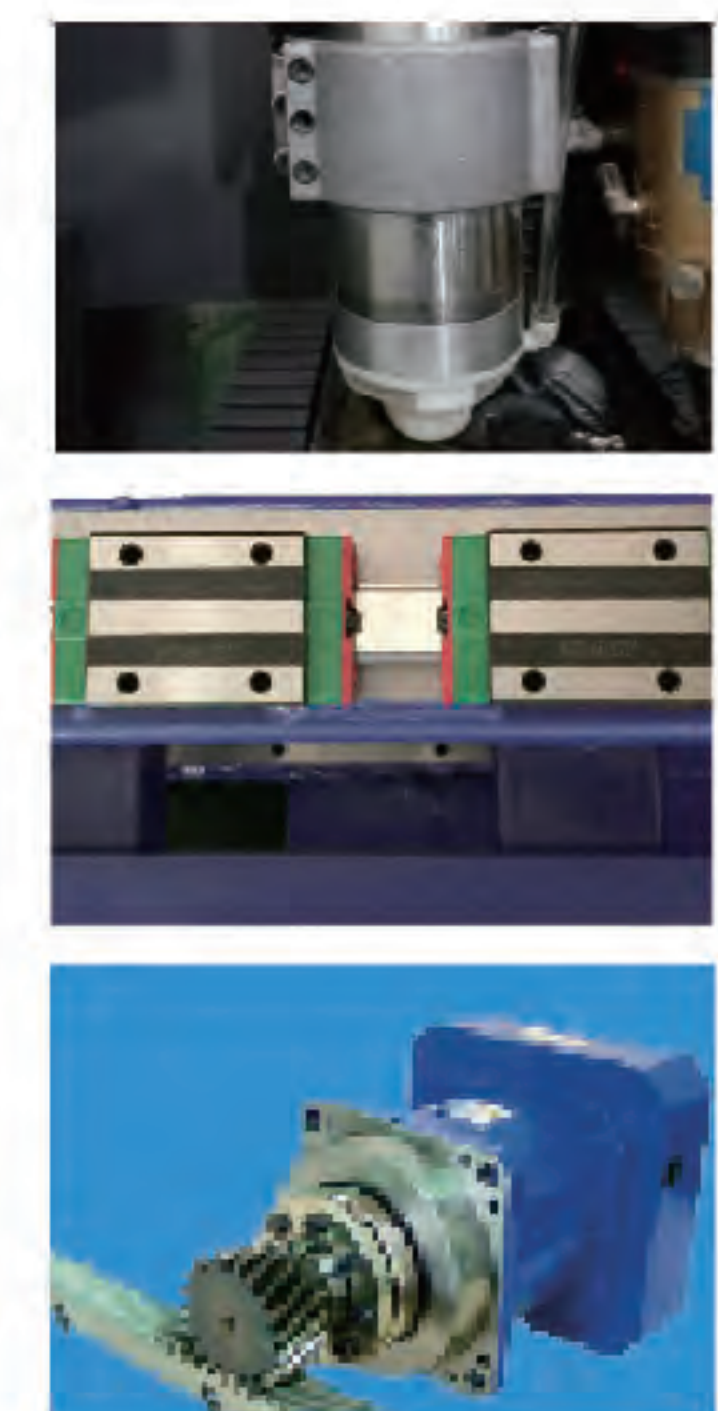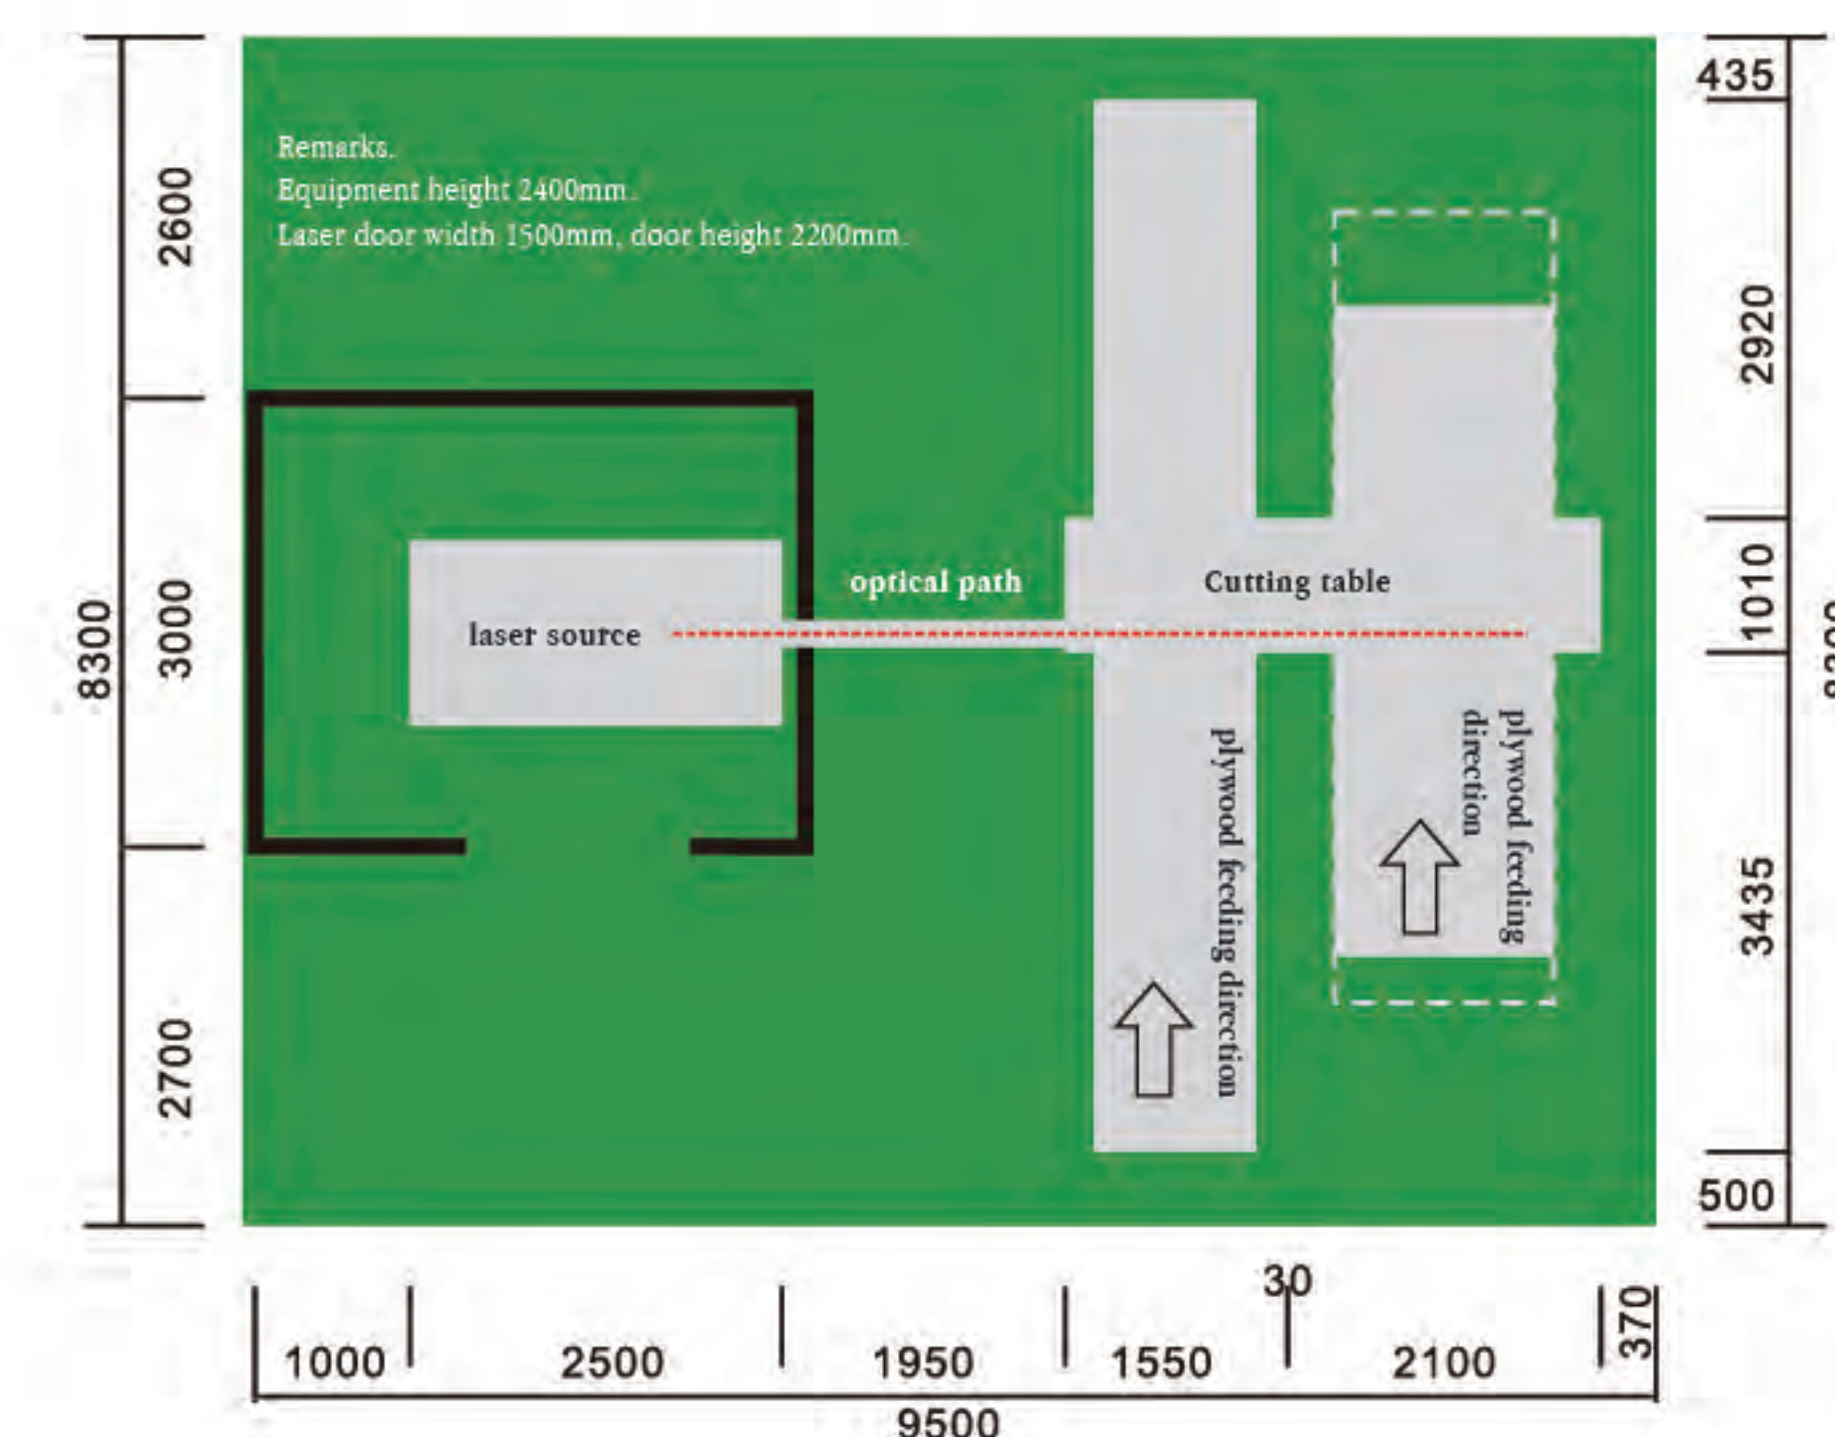

Rotary Laser Cutting Machine YT83 Series



Features and Functions

The machine has the laser cutting proprietary energy control function, machine operator function, laser operation function, and expert cutting technology library, remote diagnostic and other functions.

Anti-collision system to protect the laser head from being damaged when power is suddenly off or wrong operation.

Auto compensation system for rotary laser to adjust the tolerance when the rotary die board is tiny twisted.

The machine equipped with CAD/CAM dedicated automatic programming software, which is to facilitate the production of graphics, programming and maximize the conservation of raw materials, and special cutting process features.

The machine uses upper and lower regional dust removal system at the same time. Cutting waste funnel falls into the scrap car, which is convenient for operator to clean regularly.

The machine uses fully-enclosed cover, the effect of removing smoke is very good, 100% no smoke left in the workshop when cutting.

The machine with enclosed optical path, use positive pressure to remove the dust, which can ensure the lens life.

Stainless steel plate cover, can bear at least two weighted 80kg men standing on it, no deformation.

Eccentric shaft of rotary bed, scientific protection of the axis to avoid high temperature deformation.



Drilling router function is optional.

Counterbore drilling function: automatically drill the counterbore.

Technical Parameters

Model No	YT83 Series
Machine Construction	Gantry construction
Laser output power	High power axial flow CO2 laser source
Max.Cutting Size	170~800*3000mm
Re-Positioning Precision	≤0.02mm
Control System	Germany PA
Transmission system	Ball screw & Linear guide (TAIWAN)
Drive System	Japan YASKAWA high-precision servo motors
Optical system	US
Chilling System	Made in China
Overall dimensions (L x W x H)	7500*1500*1800mm
Laser generator gas matched	He, N2, CO2 (99.999%)
Laser cutting thickness	0.1-30mm

Machine Required Space

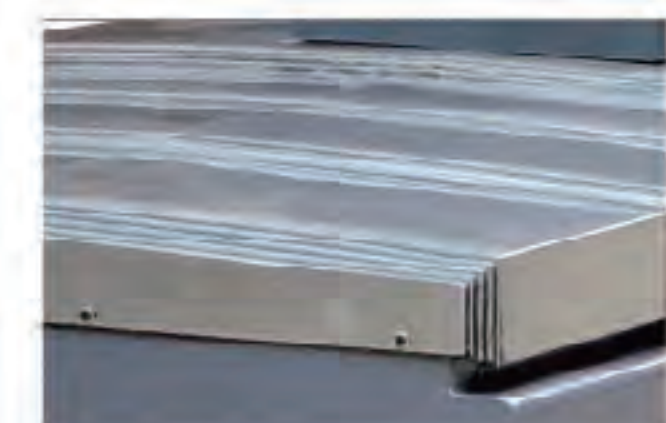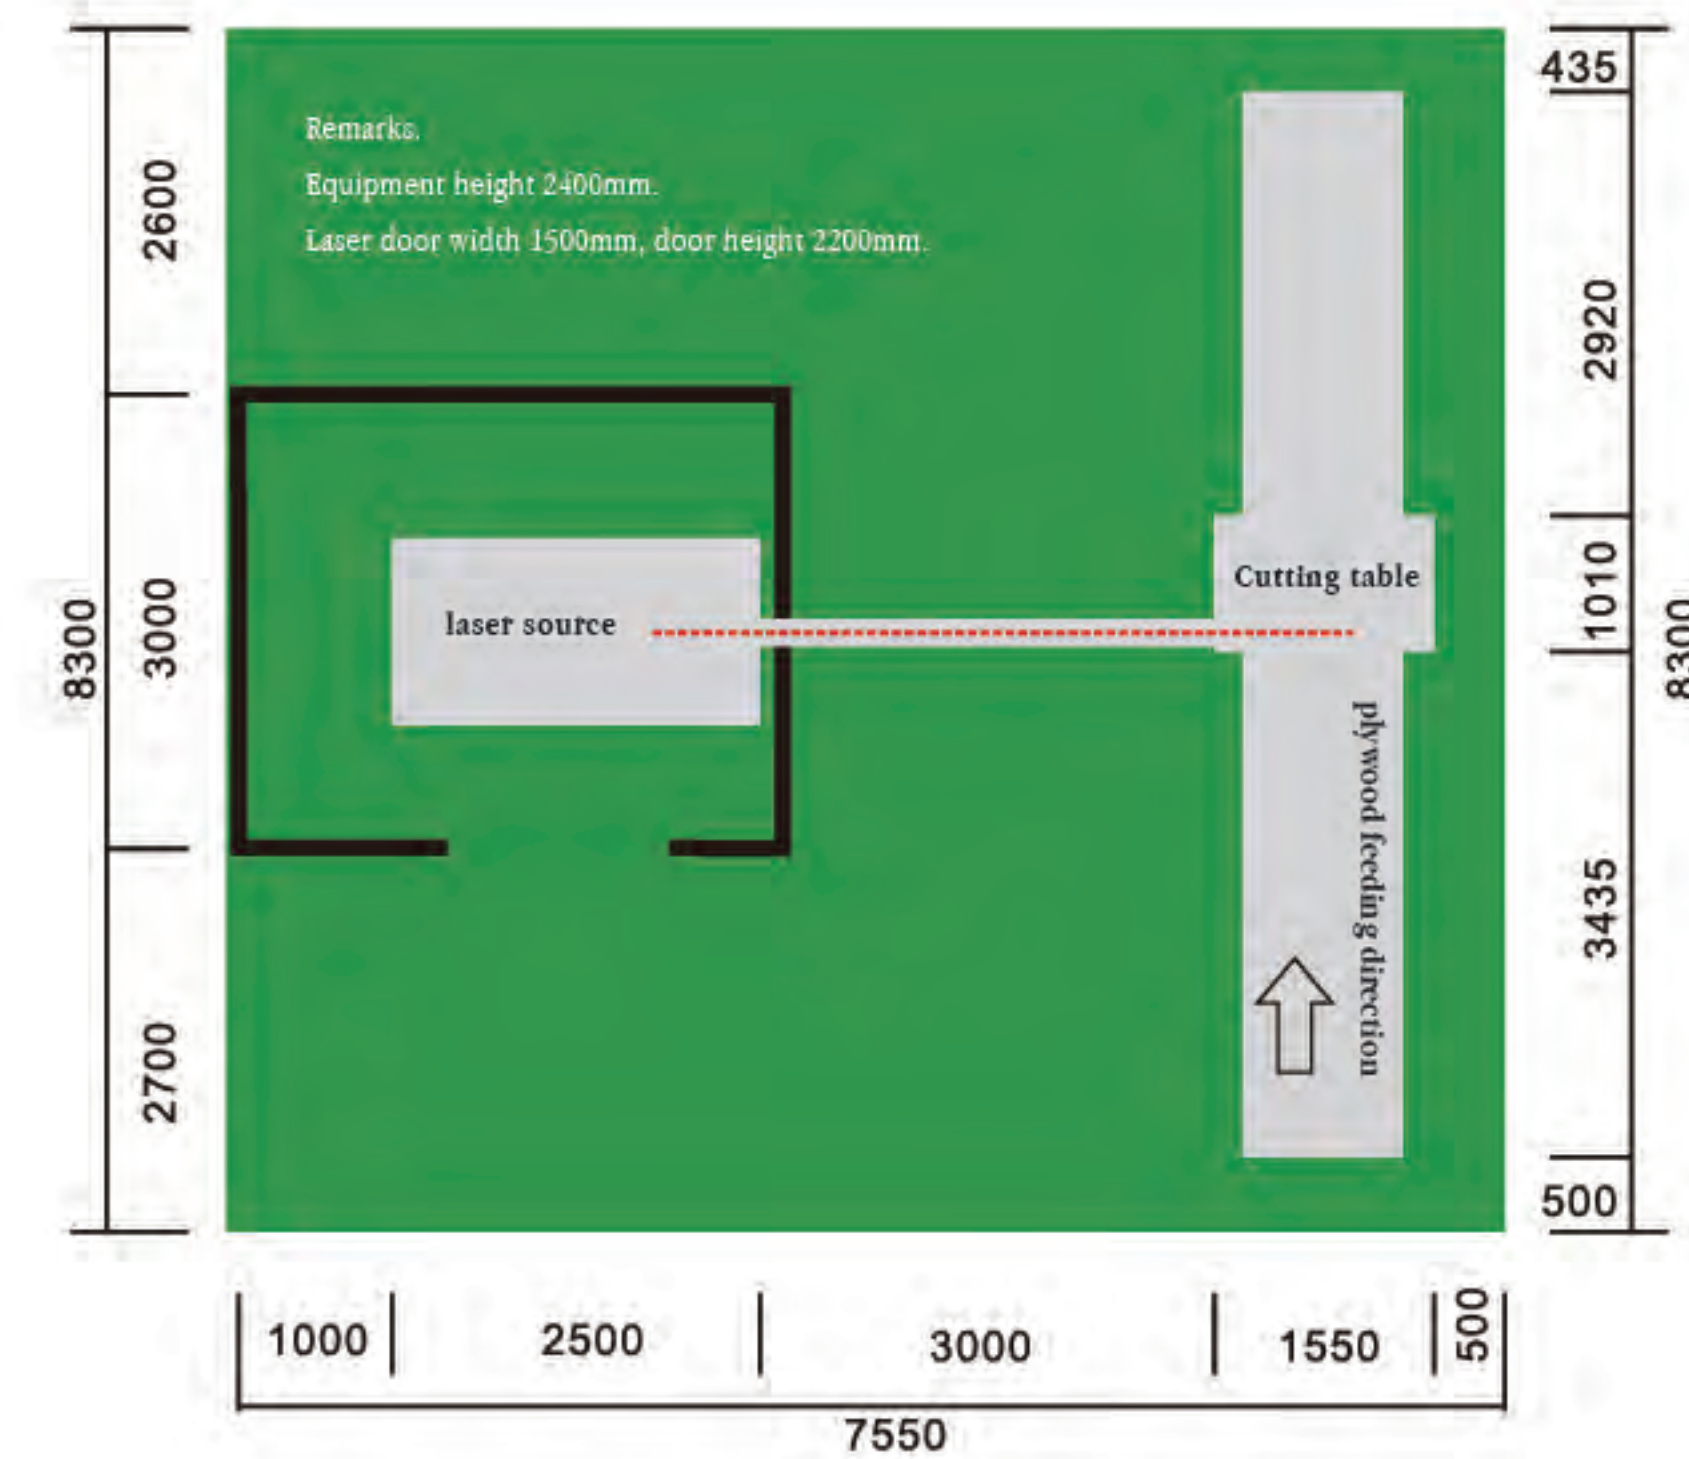

Flat Laser Cutting Machine YT48 series



Features and Functions

PA laser dedicated CNC system, laser and machine control system into one.

The machine is equipped with CAD/CAM dedicated automatic programming software, which is to facilitate the production of graphics, programming and maximize the conservation of raw materials, and special cutting process features.

The machine uses fully-enclosed cover, the effect of removing smoke is very good, 100% no smoke left in the workshop when cutting.

The machines is with enclosed optical path, uses positive pressure to remove the dust, which can ensure the lens life.

Stainless steel plate cover can bear at least two weighted 80kg men standing on it, no deformation.

Quick marking function is optional.

New laser head design with anti-collision system, two separated pressing feet with balls on the bottom, make sure moving smoothly.

Gantry type machine can individually adjust 45°, 90°, 135° and whole X direction cutting kerf tightness. X, Y, Z axis individually control.

Auto oiling system.


Cutting path display.

High energy savings: one bottle Helium gas can be used for 300hours.

Technical Parameters

Model No	YT48 series
Machine Construction	Gantry construction
Laser output power	High power axial flow CO2 laser source
X-axis travel-length	1200mm
Y-axis travel-length	2500mm
Re-Positioning Precision	≤0.02mm
Cutting kerf width	0.45mm, 0.71mm, 1.05/1.07mm at one time (die board)
Control System	Germany PA
Transmission system	Ball screw & Linear guide (TAIWAN)
Drive System	Japan YASKAWA high-precision servo motors
Optical system	US
Chilling System	Made in China
Overall dimensions (L x W x H)	4800*2300*2300mm
G. Weight	4200kg
Laser generator gas matched	He, N2, CO2(99.99%)
Laser cutting thickness	0.1-30mm
Centrifugal blower	1 set

Machine Required Space

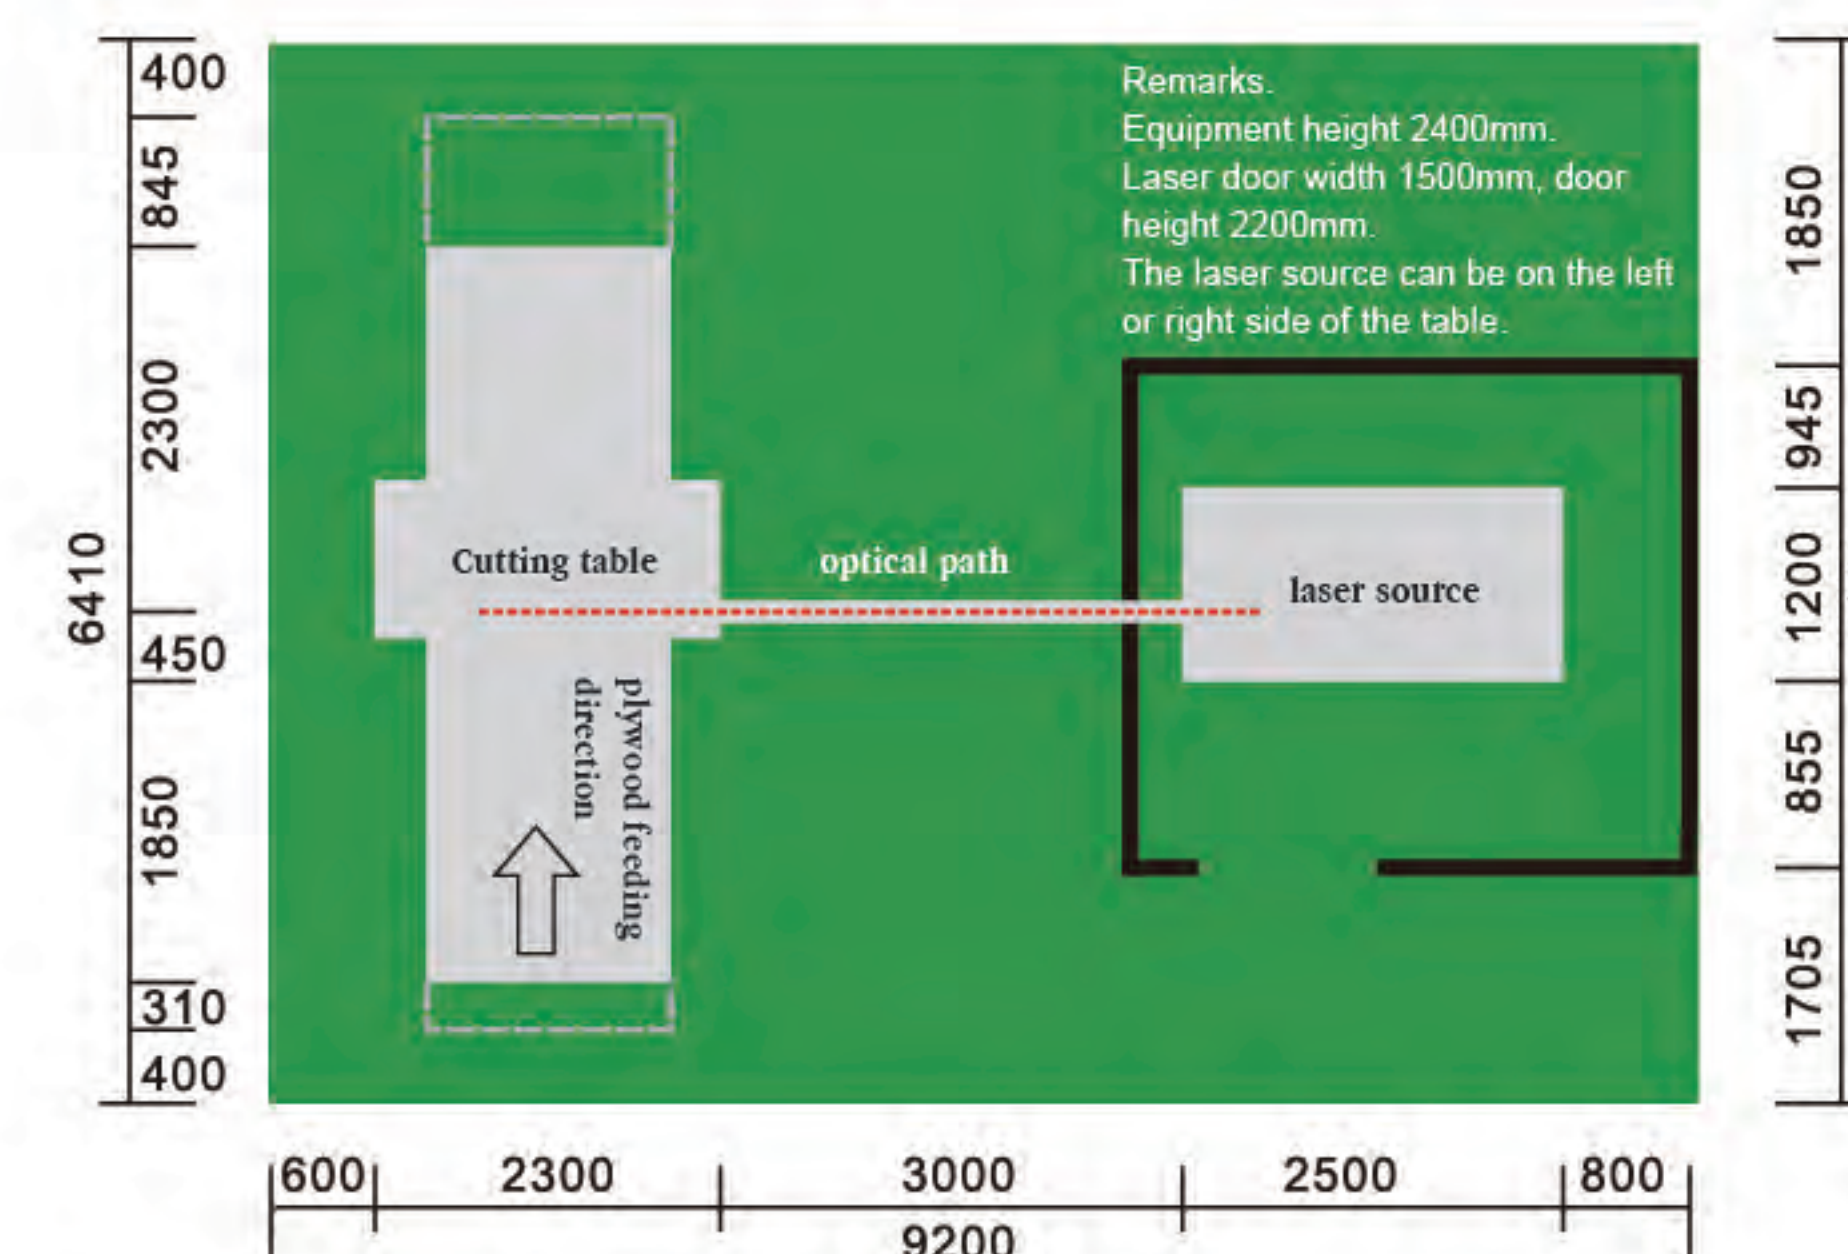

Floor space of over 1000w flat laser machine.

Laser generator can be installed at the working table's right or left side.

Height: 2.2m.

Floor space: 8.8*6.6m(l*w).



Laser Cutting Machine YT46F-40/60



Features and Functions

Gantry Construction with fixed cutting head, stable working, small floor space required for machine. Adopt domestic most advanced 400W CO2 sealing type water-cooled laser tube, combined with good precision of CNC control mechanical system. It can reach cutting die manufacturing precision and at the same time greatly reduce the production cost. Suitable for wooden cutting die and precision electronic cutting die production.

Using fixed optical path structure, to avoid the high-power cutting size problem because of the optical path deviation.

Unique smoke Exhausting design; create a good working environment for The operator Using the most advanced laser tube in China and no need to add any auxiliary gas when cutting, laser cutting die consumption is extremely low. Only 220v external power source is needed. There is no need to wait long time for starting and running the machine.

Can one-time cutting 15mm-23mm plywood, PVC board, organic glass. The cutting line width can be 0.45mm, 0.71mm, 1.05mm.

Simple and clear-cutting line adjustment technology. Cutting software can be compatible with AutoCAD. CoreDraw, Adobe Photoshop. Editing path is very easy and convenient.

Laser Tube Characters


All the optical lens imported from USA II VI Inc. making laser output power higher and more stable pattern, all the optical lens assembly are in the 100% clean room to complete, is the only manufacturer with clean assembly room.

Entirely through ISO9002 quality system certification of the manufacturers, is the only one to do CO2 laser manufacturers through this certification.

Technical Parameters

Model No	YT46F			
Power	400W/600 W			
The table style	Gantry construction with fixed cutting head			
Laser source	laser tube			
X-axis travel-length	1200mm			
Y-axis travel-length	1800mm			
Cutting speed	18 mm die board	400W	30~36m/H	600W 40-50m/H
	2mm stainless steel	400W	60m/H	600W 60m/H
Re-Positioning Precision	≤0.02mm			
Cutting width kerf	0.45mm, 0.71mm, 1.05mm, 1.07mm			
Transmission system	Ball screw & Linear guide (TAIWAN)			
Drive System	Japanese technology			
Optical system	US program			
Overall dimensions (L*W*H)	4600*2300*1800mm			
Gross Weight	2000kg			
Laser cutting thickness	1-25mm(plywood, acrylic board, rubber, pvc board, leather, MDF board)			
Metal cutting thickness	Carbon steel/iron stee	400W	3mm	600W 4mm
	Stainless steel	400W	1.5mm	600W 2mm

Machine Required Space

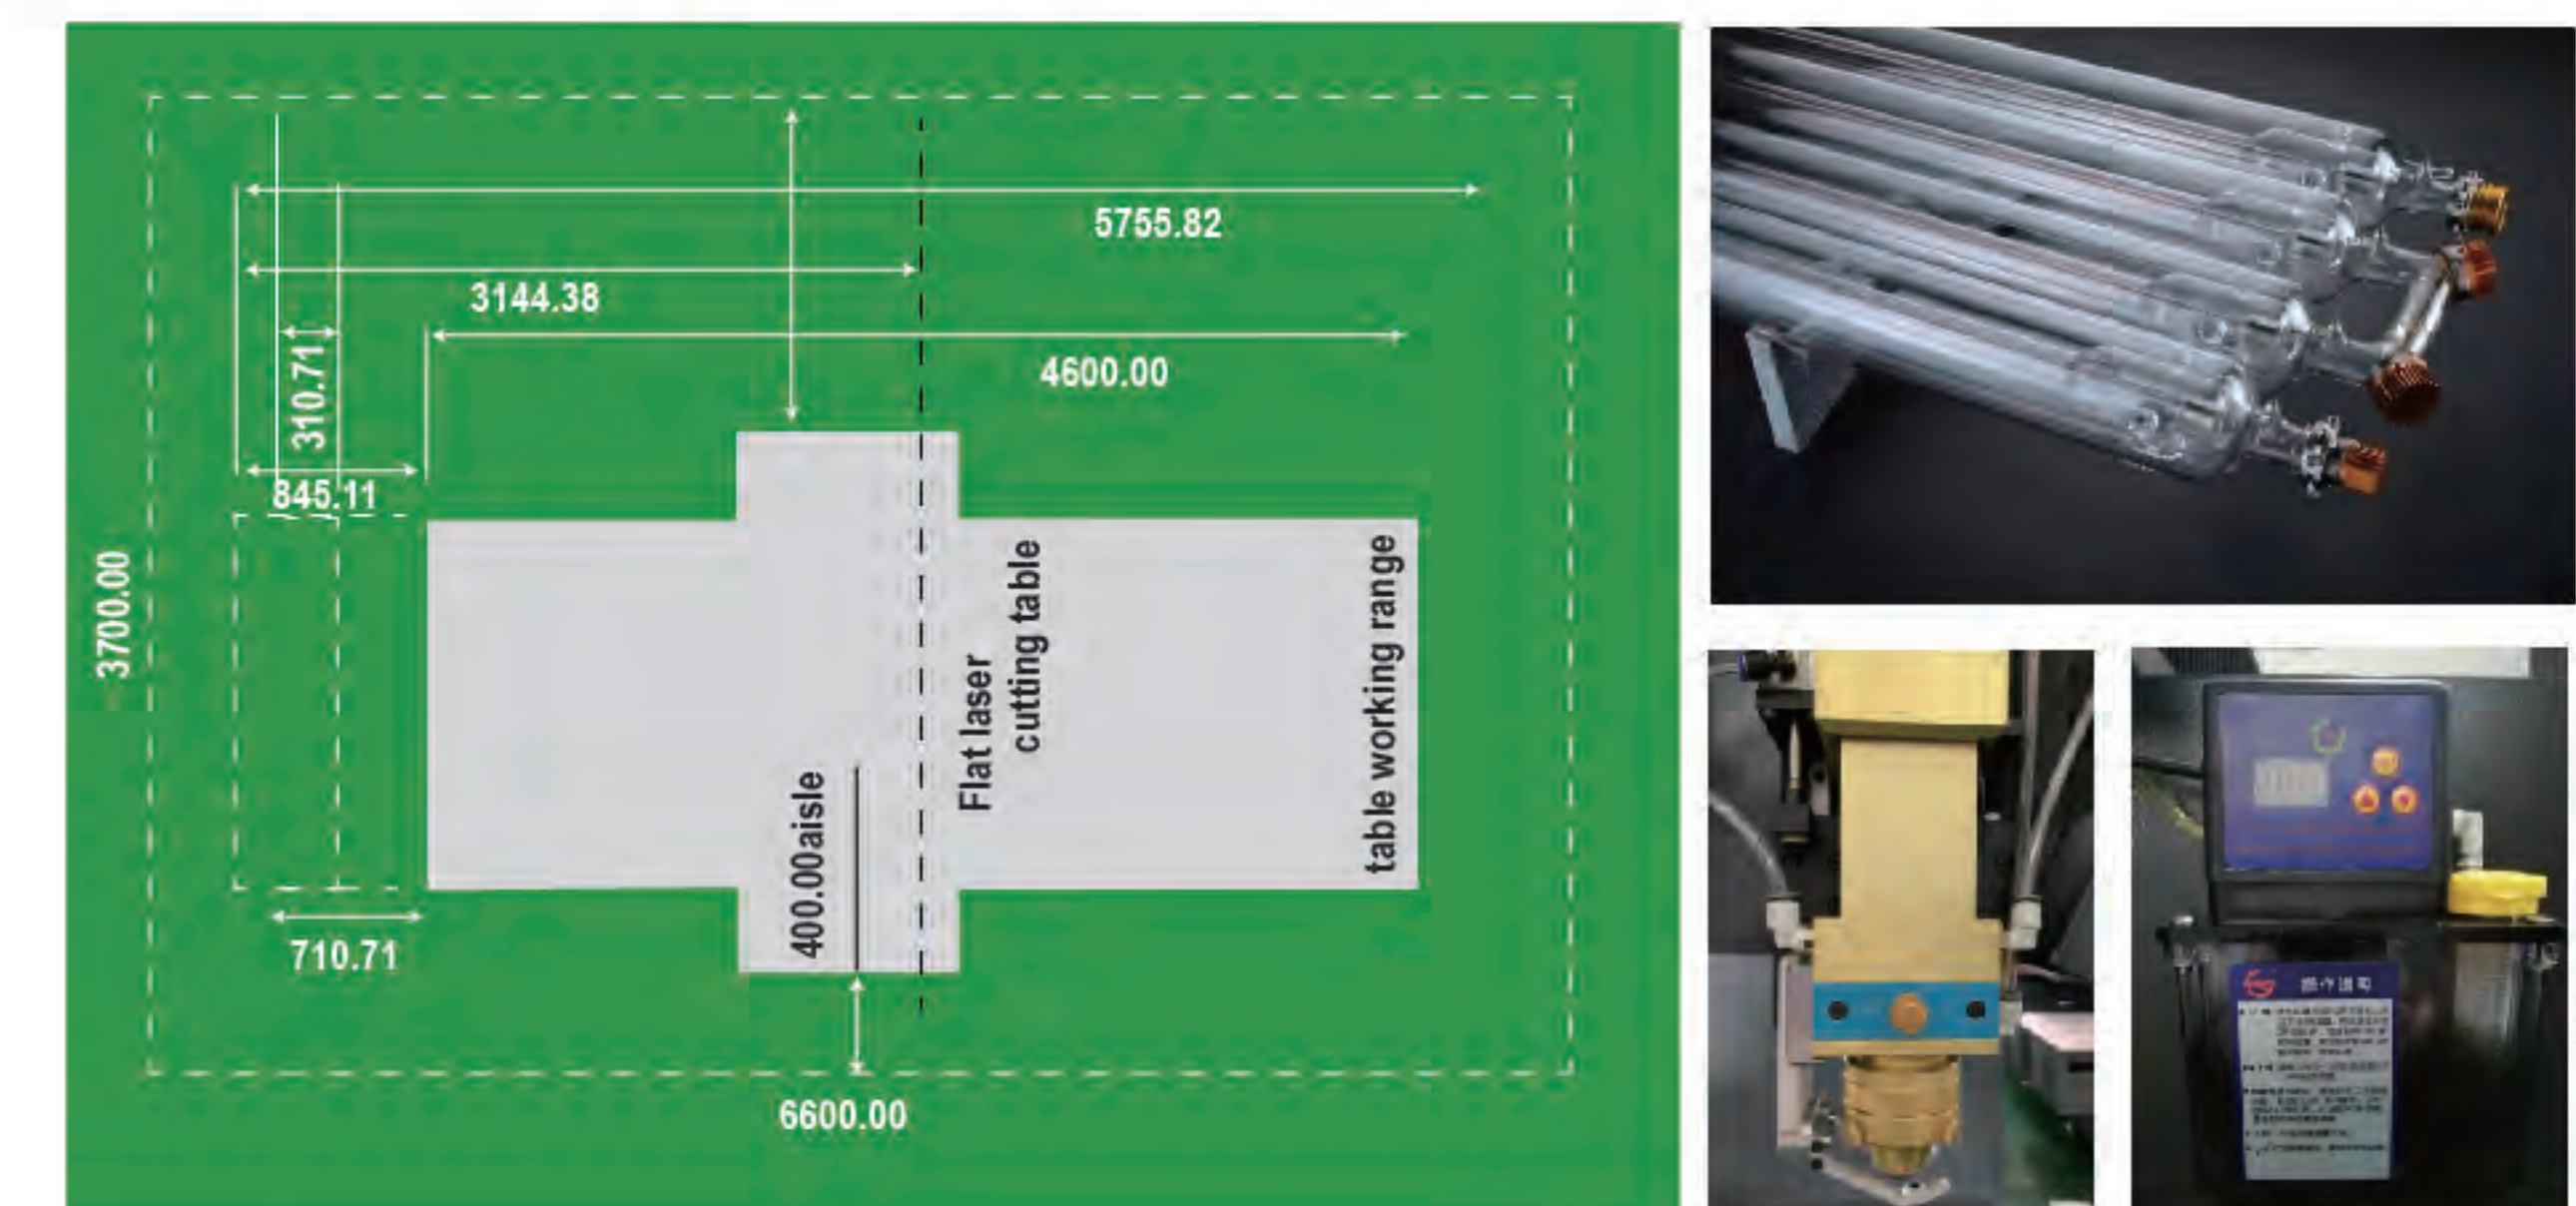

Cross Table Laser Cutting Machine YT46C-40/60





Features and Functions

Cross table construction stable cutting, small floor space required for the machine.
Adopt domestic advanced CO2 sealing type water-cooled laser tube, combined with good precision of CNC control mechanical system. Suitable for wooden cutting die and precision electronic cutting die production.
Use split type fixed optical path structure, to avoid the high-power cutting size problem because of the optical path deviation.
Unique smoke Exhausting design; create a good working environment for worker. Only 220v external power source is needed There is no need to wait long time for start and running the machine.
Can cut 15mm-23mm plywood, PVC board, organic glass. The cutting line width can be 0.45mm, 0.71mm, 1.05mm, 1.42mm etc.
Simple and clear-cutting line adjustment technology. Cutting software can be compatible with AutoCAD, CorelDraw, Adobe Photoshop. Editing path is very easy and convenient.

Technical Parameters

Model No	YT46C
The table style	Cross table construction
Laser source	laser tube
X-axis travel-length	1200mm
Y-axis travel-length	1800mm
Cutting speed	400W 600W 28-32m/h 36-40m/h
Re-Positioning Precision	≤0.02mm
Cutting kerf width	0.45mm, 0.71mm, 1.05/1.07mm at one time (die board)
Transmission system	Ball screw & Linear guide (TAIWAN)
Drive System	Chinese servo motors
Optical system	US program
Gross Weight	2000kg
Laser cutting thickness	1-25mm

Machine Required Space

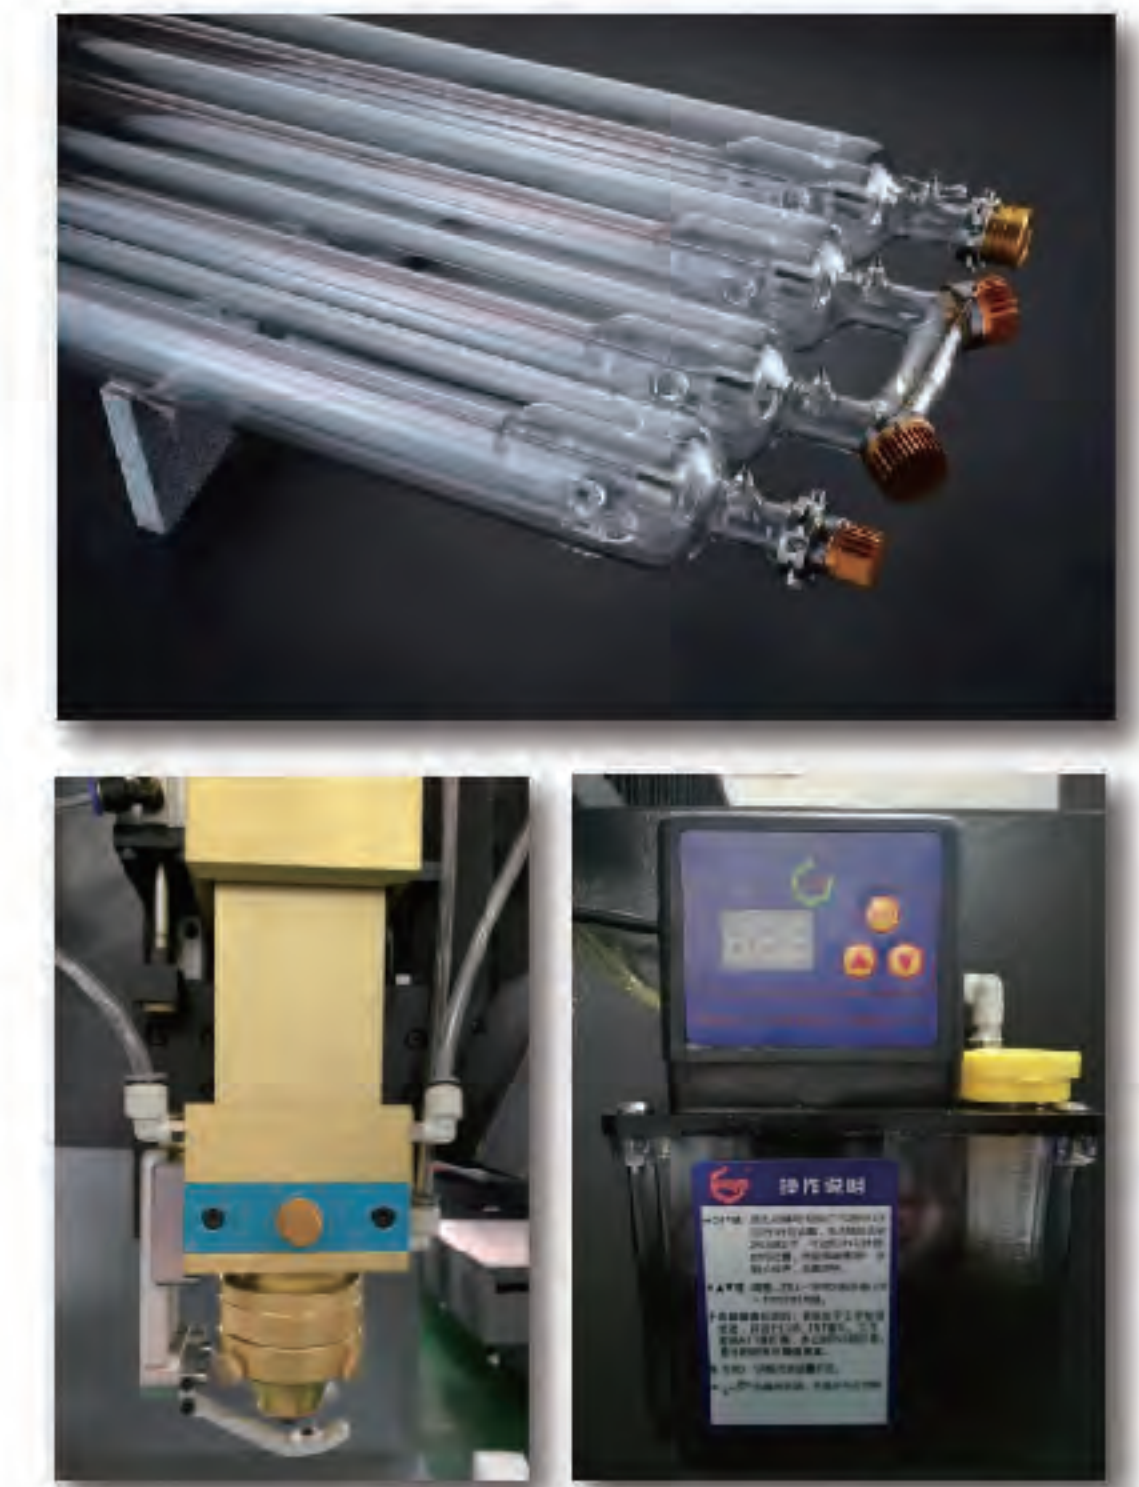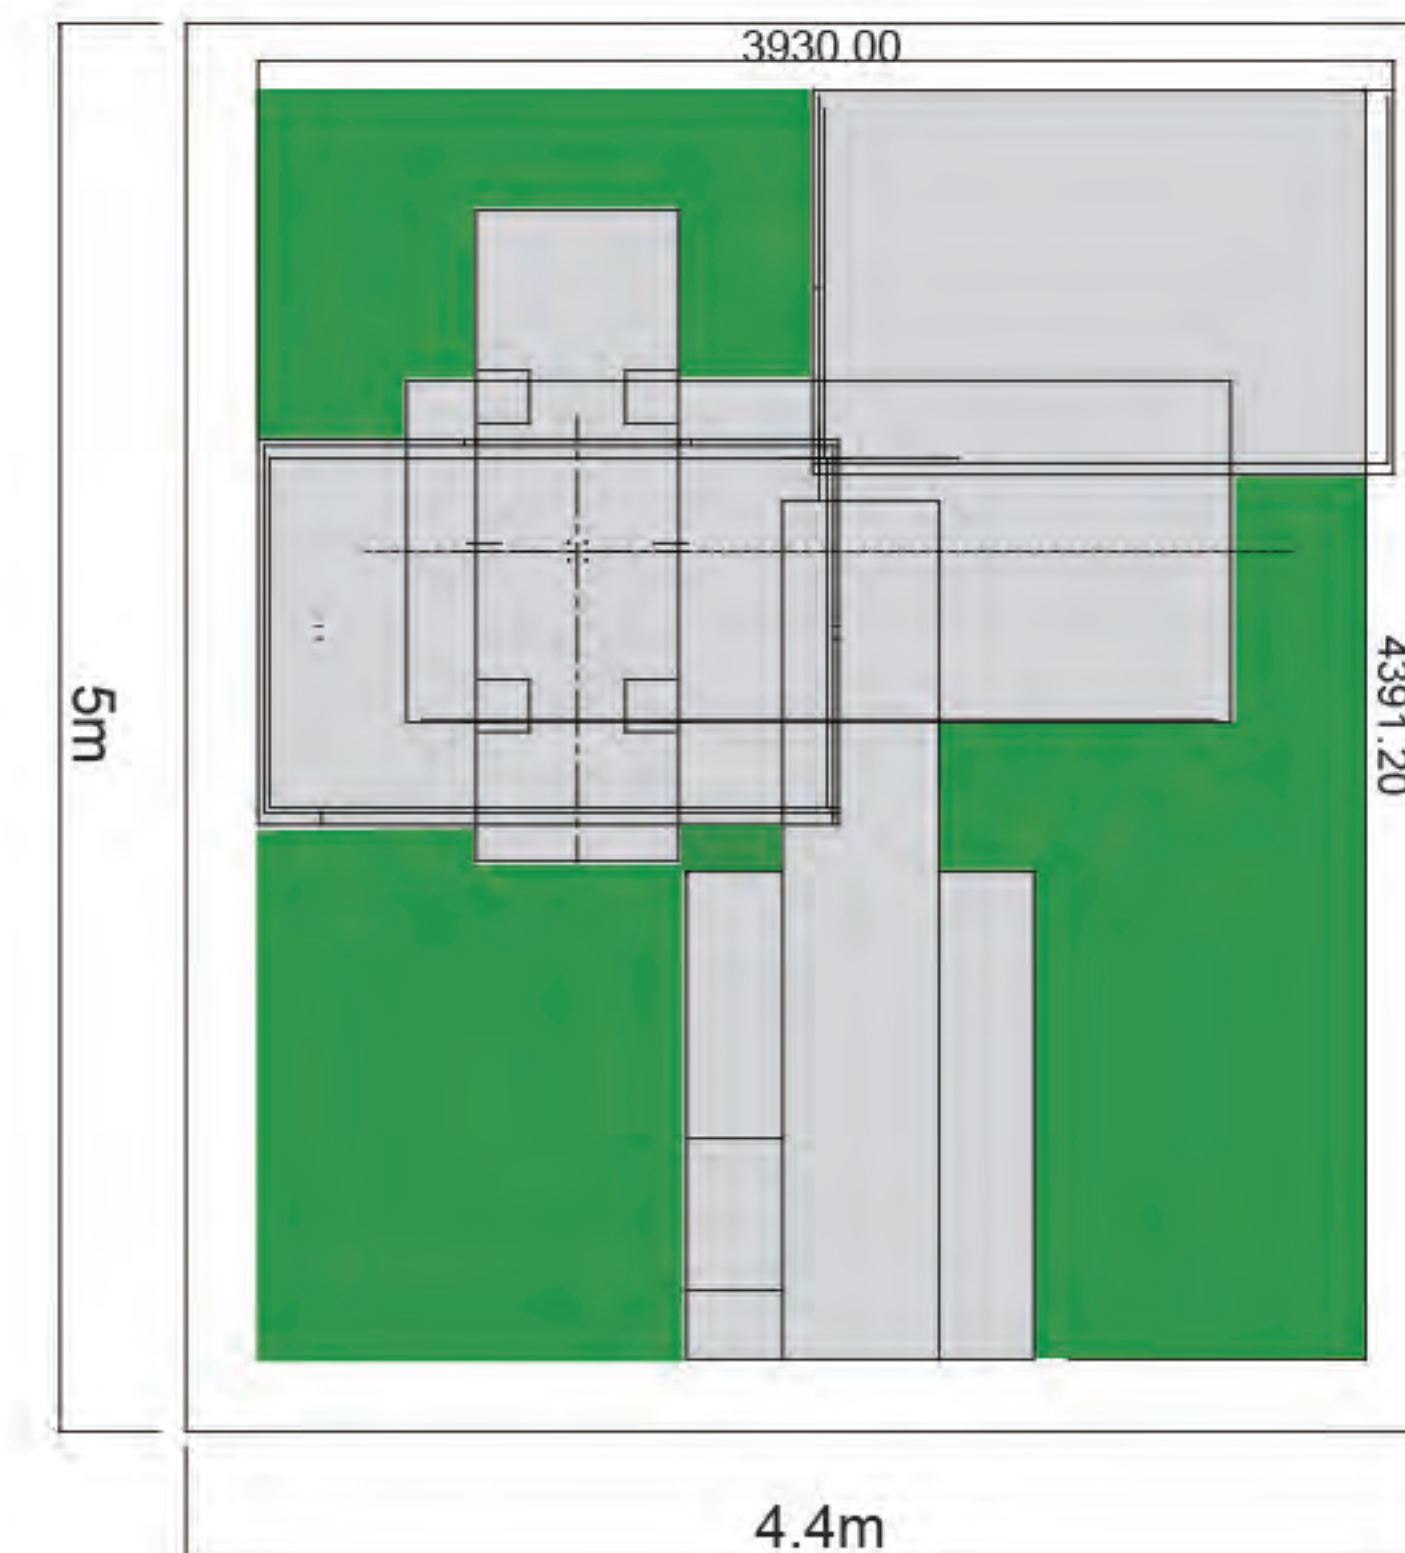

Laser Engraving Machine YT43-8/15



Applications

Our laser cutting machine JCDQ is specially designed for acrylic board, PVC board, electronic film, leather and plywood. The cutting surface is smooth and clear. Our machine can be used in handcrafted gift, packaging and printing, toy model, advertisement, electronic appliances and mobile communications.

Features and Functions

The high-frequency enclosed CO2 laser tube developed by domestic top technology, which can uniformly emit light for 24 hours, and with anti-interference ability.

The optical system uses total reflection and full transmittance silicon lens, the beam is fine and constant, the cutting depth is large, and the engraving precision is high.

Technical Parameters

Model	YT32	YT42	YT43	YT53
Cutting area	900*600mm	1200*600mm	1300*900mm	1500*900mm
Power	80-150w	80-150w	80-150w	80-150w
Machine size	2000*1100*1100	2000*1100*1100	2000*1400*1100	2000*1400*1100
Positioning accuracy	±0.01mm	±0.01mm	±0.01mm	±0.01mm
Memory capacity	32M	32M	32M	32M
Input voltage	220V±10%	220V±10%	220V±10%	220V±10%
Machine required space	Length: 2000mm Width: 1100mm/1400mm Height: 1100mm			

CO2 Laser Machine YT45-15



Features and Functions

Special used for label die making

Support different software forms: dxf, dwg, AI, etc.

Fully enclosed oil soaking design, prevent rust, no need to add oil by hand.

Adopt domestic advanced laser tube, 24 hours continuous output, strong anti-interference ability.

Adopt Taiwan linear guide and ball screw, mixing with micrometer measurement, machine uses the overall structure to ensure the verticality and levelness of the countertop.

The optical system uses full reflection and full transmittance silicon wafers, the beam is fine and constant, the cutting depth is large, and the cutting precision is high.

Intelligent software, the operator can set acceleration/deceleration/constant speed mode of operation according to the processing demand. Graphic output can run cleaning, delineating, cutting all at once.

Compatible with a variety of drawing software, AutoCad, CorelDraw, Photoshop, etc.

Can make 6/9mm plywood dies with smooth cutting kerf.

Can cut many kinds of thin non-metal plates, such as cabrasive paper, acrylic, adhesive sticker, etc.

Technical Parameters

Model No	YT32-15	YT45-15
Effective working table size	900*600mm	1200*900mm
Cutting speed	600mm/min	600mm/min
Min cutting thickness	1mm	1mm
positioning accuracy	±0.03	±0.03
Input power	220±10%	360±10%
Overall Size	1800*1100*1100mm	2200*1400*1100mm
Weight	0.45T	0.45T
Power available	80W 100W 150W	80W 100W 150W

CNC Rotary Router YTR8



►► Applications

The CNC rotary router is a great help in field of rotary die making. The development of CNC technology makes the cutting of rotary die board more features: low energy consumption, high accuracy, high efficiency and easy operation.

►► Features and Functions


Low cost machine, quickly to return investment.
Low consumption, two degrees of electricity per hour only.
Low maintenance cost, milling cutter consumption only.
Working environmental protection.
Fully automatically drilling cut the installation hole, one-time to complete the rotary die cutting process.
High rigidity machine bed with annealing process to ensure the accuracy.
Fully closed design, isolation of dust, no pollution.

►► Machine Required Field



Small installation space needed only 4.8M length by 1.5M width.

►► Technical Parameters

Model no	YTR8
Max.Cutting Size	170~800*3000mm
Cutting speed	0.21-0.72m/min
Cutting Precision	0.05mm
Transmission system	Precision linear ball guide
Drive	Taiwan motor
Machine size	4.2*1.2*2.2m(L*W*H)
Weight	1700KGS
Power	3.5KW
Power supply	Single phase,220v,50/60hz

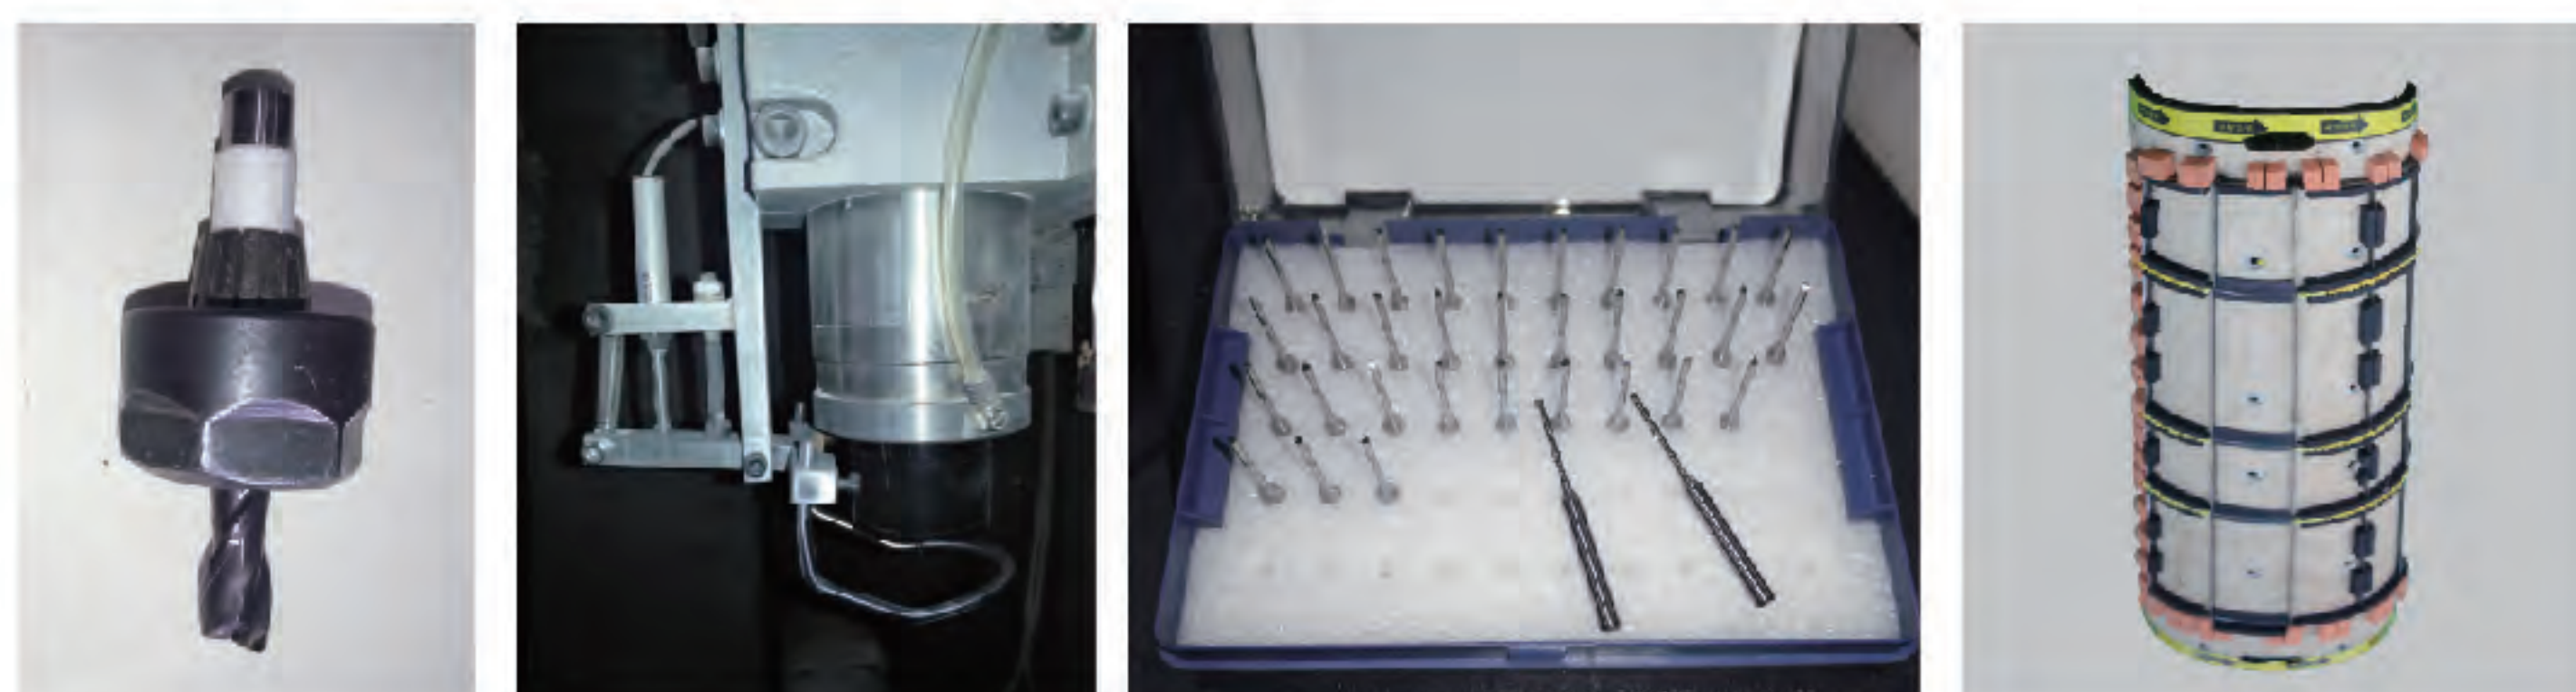

Sandwich Die Routing Machine YS1290

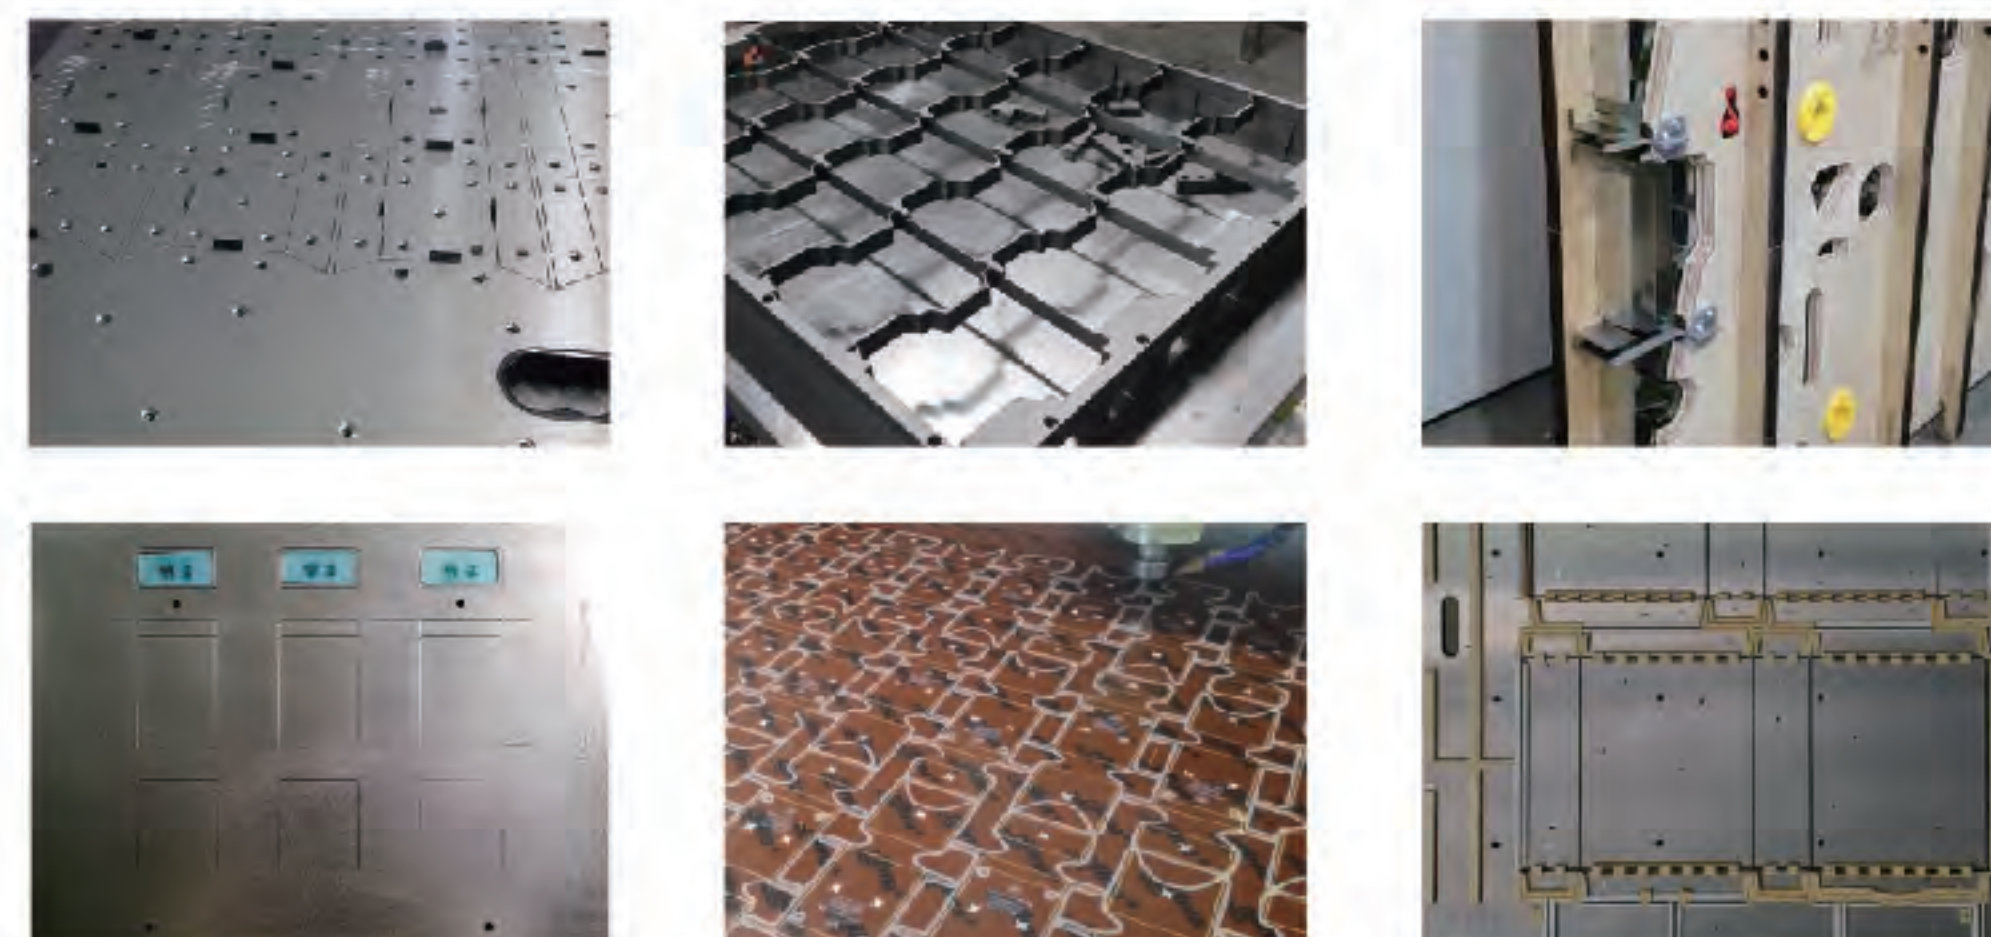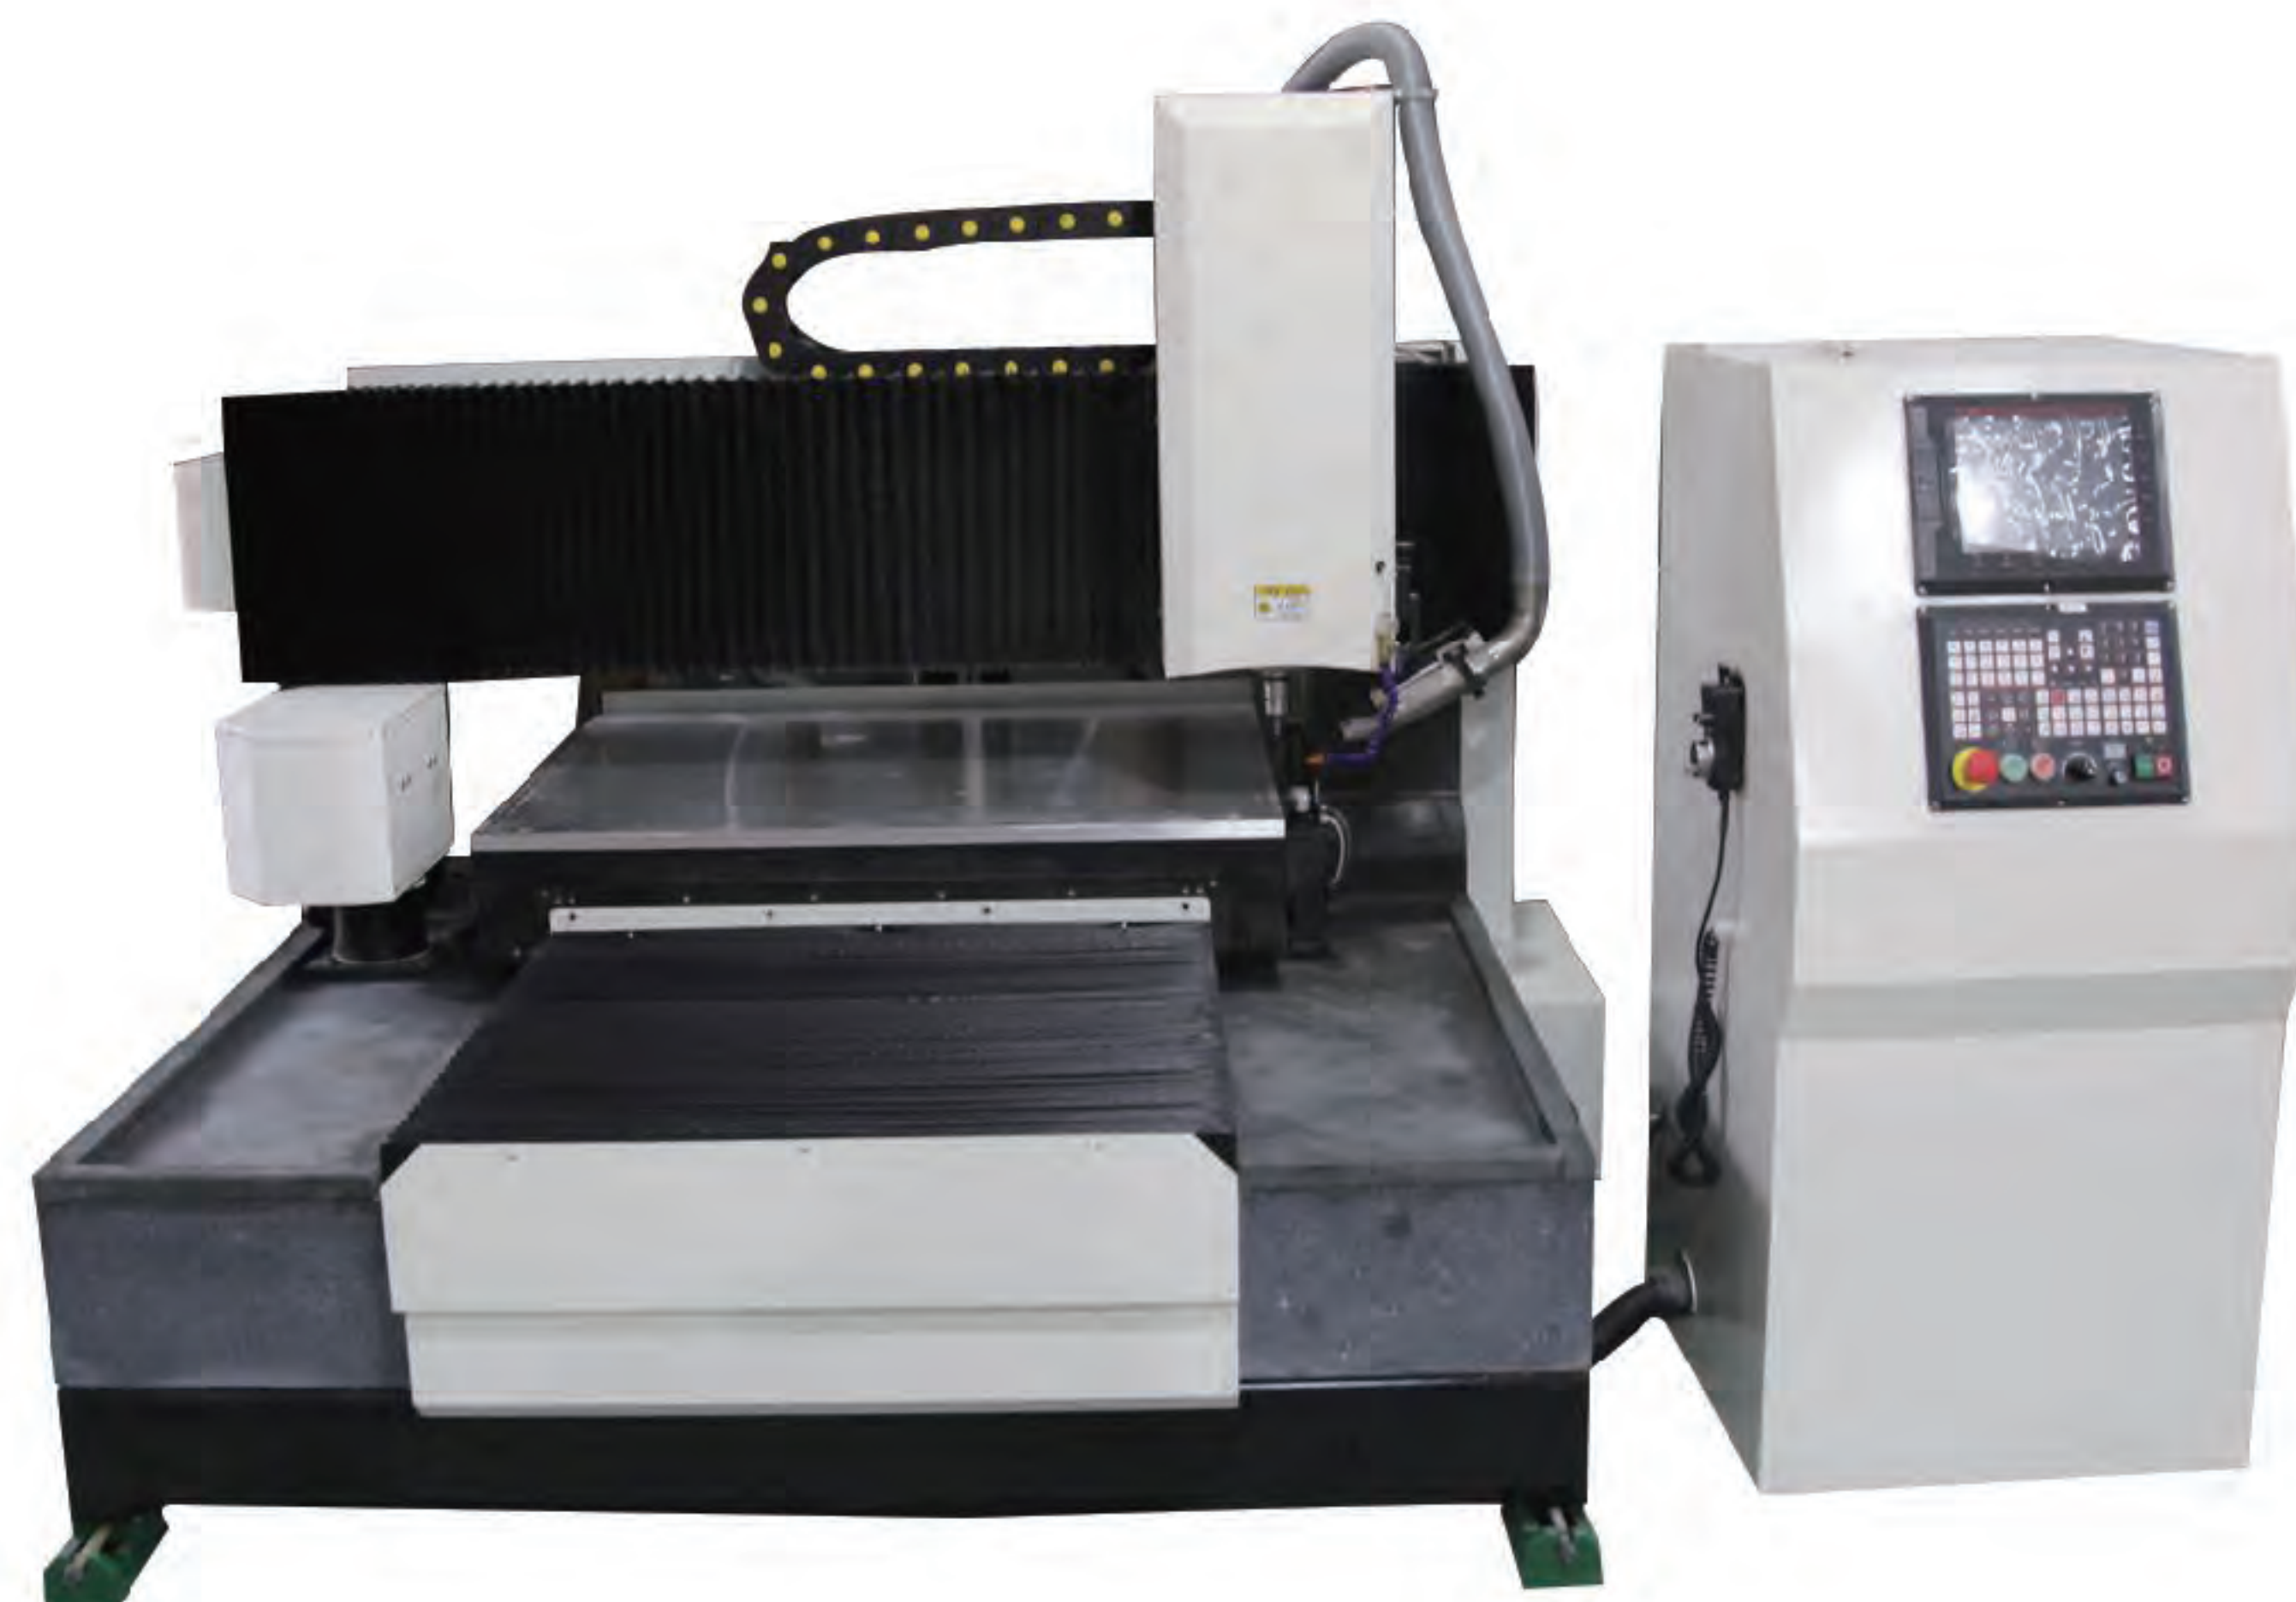

► Applications

CNC sandwich die routing machine is mainly for making high precision sandwich die and other related products in cigarette case, pill box industry. The machine can be used in making aluminum sandwich die, resin sandwich die, wooden die, steel counter die, pertinax counter, blanking die, stripping die, embossing die, etc. Fully marble construction ensures the machine with long-term stability and without deformation.

► Features and Functions

High cutting speed, no-loading speed reaches 15m/min.
Marble working table makes sure the stability.
Re-positioning precision is 0.005mm.
Use standard G code.
Auto tool changer can finish the production at one time.

► Machine Required Space

Length:2.3m Width:2.2m Height:1.6m

► Technical Parameters

Model No	YS1290
X-axis travel-length	1200mm
Y-axis travel-length	900mm
Z-axis travel-length	150mm
Rotational speed	30000RPM
Moving speed	13m/min
Positioning precision	0.01mm
Re-positioning precision	0.005mm
Max weight of table load	300kg
Resolving power	0.001
Power	380V/8KW (three-phase supply)
Weight	5500kg
Overall dimensions (L*W*H)	2300*2200*1600mm

Water Jet Cutting Machine YW5010



►► Applications

YW5010 water jet cutting machine is mainly used for cutting sponge, rubber, etc. The machine is very easy to operate, and it is friendly to the environment when working, customer no need to spend much time for maintenance. It provides die makers with faster and more efficient die making service.

►► Features and Functions

- Quick response. There is no need to wait long time to start and run the machine.
- Can cut max. 60mm sponge, 20mm rubber.
- Simple cutting line adjustment technology. Cutting software can be compatible with AutoCAD. Corel-Draw. Editing path is very easy and convenient.
- All kinds of shapes for die making slot, cutting materials: — ejection rubber, Vulcan, sponge, foam.
- The water beam is only 0.13mm.
- Cutting speed up to 10m/minute.
- Easy maintenance and operation system.
- Friendly to environment, no pollution.
- Save labor time of the die making.
- Improvement for the beautiful outlook of cutting die.
- Low consumption cost - Only use water to cut.


►► Machine Required Sapce

Length: 3m Width: 2m Height: 2m

►► Technical Parameters

Model No	YW5010
X-axis travel-length	1000mm
Y-axis travel-length	500mm
Moving speed	10m/min
Positioning Precision	0.05mm
Max weight of table load	100KG
Resolving power	0.001
Power	380V/7.5KW (three-phase supply)
G. Weight	300kg
Cutting bed	1.0*1.5*1.3m
High pressure cabinet	1.2*0.8*1.1m

Pertinax Milling Machine YT110

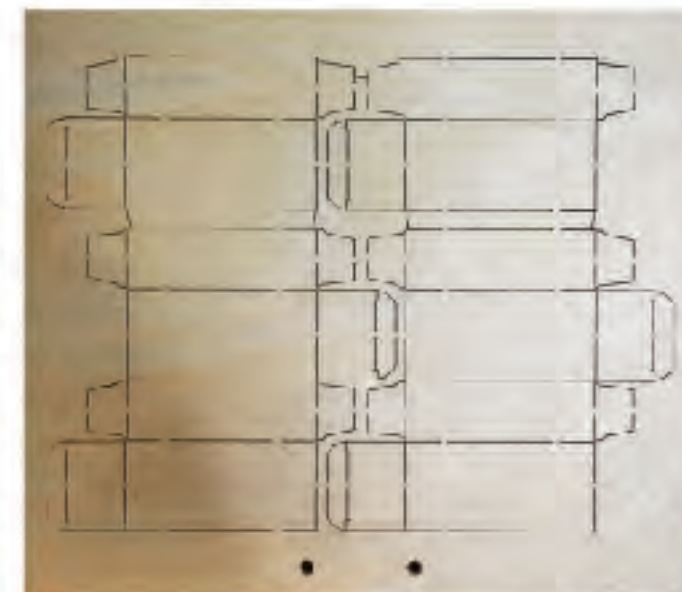

►► Applications

PERTINAX Milling machine is mainly for cutting the PERTINAX in Sandwich die industry, and can also be used to cut sponges and wood boards. In addition to having the functions of a conventional pertinax milling machine, it also replaces the functions of water jet cutting machine and laser machine to a certain extent. Besides, the machine can also mill the edges of stripping die.

►► Features and Functions

Efficient cutting speed, no-load speed can reach 10m/min
The screw rod is made by grinding process, the accuracy can reach 0.03mm, C5 level
High flatness of the table top (can be tested by a flatness detector)
The spindle speed can reach 60000 rpm, 2.5KW power, stable, durable and fast
6 sets of auto cutter exchanger to finish production one time

►► Overall Dimensions

Length:1600mm Width:1800mm Height:1400mm

►► Technical Parameters

Model No.	YT110
X-axis travel-length	1100mm
Y-axis travel-length	1080mm
Z-axis travel-length	90mm
No-load speed	10m/min
Rotational speed	60000RPM
Cutting Precision	0.02mm
Re-Positioning Precision	0.01mm
Cutting thickness	Flat plywood 18mm, PVC 6mm, Sponge 7mm
Spindle Tolerance	<0.003mm
Power	380V/6KW (three-phase supply)
Overall dimensions (L*W*H)	1600*1800*1400mm
G. Weight	2200kg

Auto Bending Machine B3-CBN



Applications

The B3-CBN is a great help in field of flat die making. The development of auto bending technology make the die making rule process: low energy consumption, high accuracy, high efficiency and easy operation.

Our Ideas for Design


1. Dual-screw feeding system will be suitable to all kinds of rules
2. Stable and reliable design will extend working life.
3. Improving safety system to avoid accident.
4. Changing spare parts to be more convenient
5. Applying newest control system to achieve better performance

Advantages

1. Multi function punching mold system (punching+cutting+lipping+perforation)
2. Patented double-screw feeding system, cutting height 7~32mm using the same mold, Feeding speed is fast and precise.
3. The top-mounted broaching system is convenient for blade replacement and maintenance, good chip removal and easy cleaning.
4. All servo system is adopted, which is efficient and energy-saving, accurate and stable, clean and easy to maintain.
5. (Optional) Tungsten nicking blade (0.18~1mm) is efficient, stable and long lifetime.

Technical Parameters

Bending Blade thickness(mm)	0.71mm/1.07mm
Bending Blade height(mm)	7mm-32mm
Bridge width	Over 3mm any sizes available
Bridge height	10-20mm
Nick depth range	0.18-1mm
Air supply	1CFM at 6 bars
Power supply	Single Phases 220V, 20A 3KW, 50/60Hz
Gross weight	420KGS
Overall dimension	2800×800×1500mm(L×W×H)
Package	Wooden case

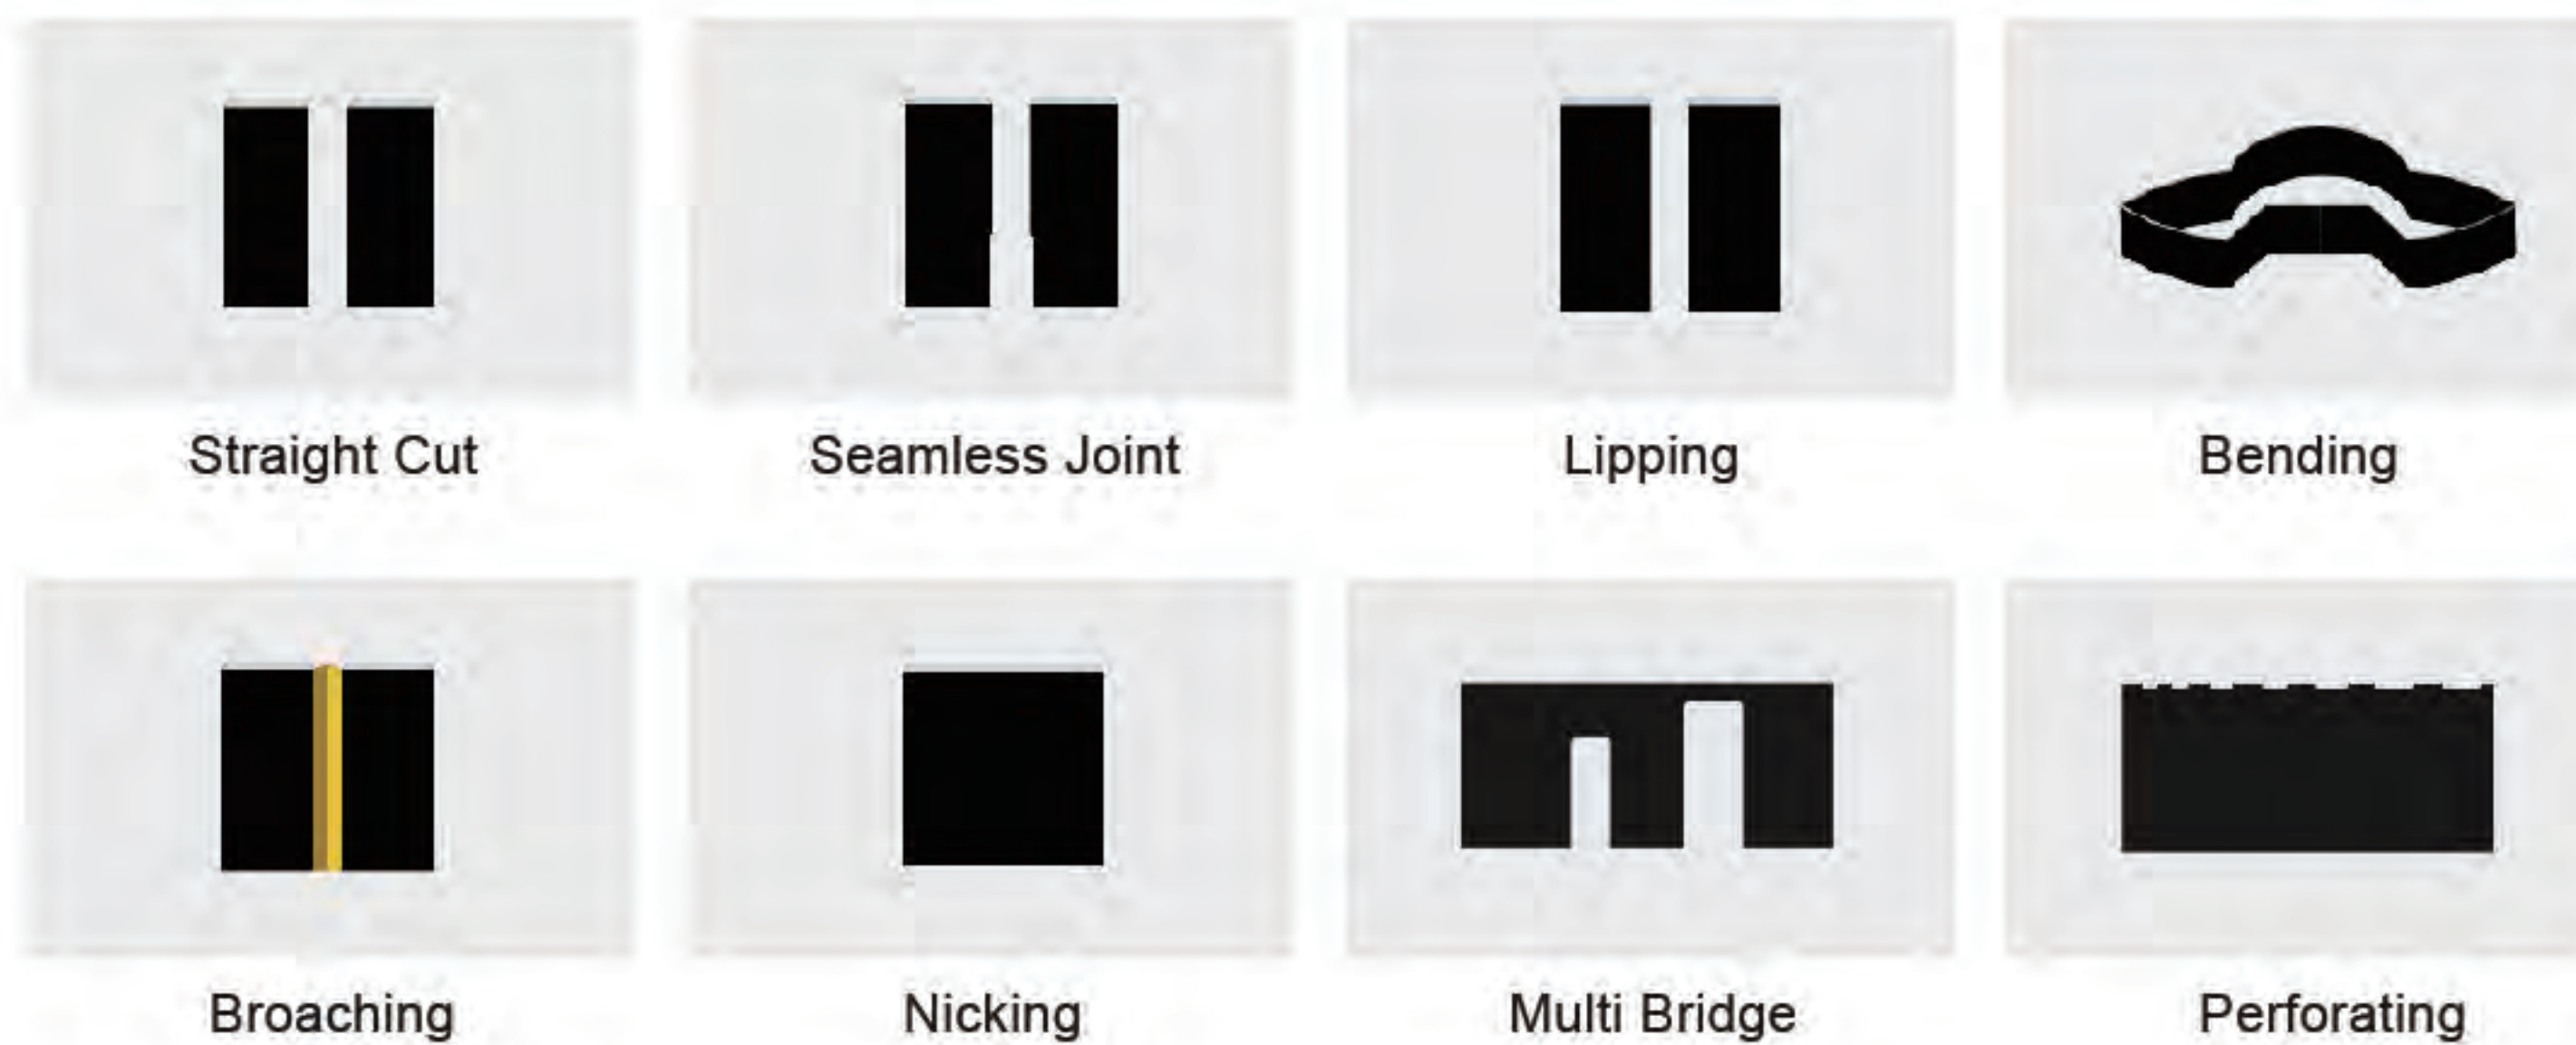

Rotary Bending Machine BR1



►► Applications

The BR1 is a great help in field of rotary die making. The development of auto bending technology make the die making rule process: low energy consumption, high accuracy, high efficiency and easy operation.

►► Our Ideas for Design

1. Dual-screw feeding system will be suitable to all kinds of rules
2. Stable and reliable design will extend working life.
3. Improving safety system to avoid accident.
4. Changing spare parts to be more convenient
5. Applying newest control system to achieve better performance

►► Advantages

1. The level of bending tools could be adjusted based on different rule height.
2. The six coil auto-feed could be managed by software which is unique
3. Machine is equipped with 10 Fuji Motor to ensure high process speed.
4. Forming shape rate high, reach 90%, reduce labor adjusting and fixing and speed production capacity.
5. Unique software can automatically identify functions, without manual selection, save your time
6. Mold durable, replacement time for about one year while market normally max. Half year have to change.
7. The machine adopts two sets of totally separate system for straight rule and curved rule, and operator just need to click on button to complete any switches of the two systems. Thus greatly improved efficiency of work.

►► Technical Parameters

Model No.	BR1
Bending Blade thickness(mm)	1.42mm(0.71mm, 1.07mm optional)
Bending Blade height(mm)	23.8-26.9mm
Blade diameter	250-700mm
Bridge height	8-18mm (die punching)
180 degree bending min. radius	5mm
Min. length of 90 degree bending	5mm
Feeding precision	±0.03mm
Bending flatness	±0.2mm
Functions	Bending, cutting, bridging, notching, perforation, lipping

Laser Source JCN Series

Features and Functions



Roots Pump is economical model.

With Colorful Touch Screen Control Panel, simple and convenient operation.

Laser Source	1000-N	1500-N	2000-N
Laser wavelength	10.6um	10.6um	10.6um
Power range	200-1000W	200-1500W	200-2000W
Laser power stability	≤±2%	≤±2%	≤±2%
Working way	Continue/Pulse	Continue/Pulse	Continue/Pulse
Preheat time	6 minutes	6 minutes	6 minutes
Input power	380V±10%	380V±10%	380V±10%

JCW Series

Features and Functions



Turbo pump consumption is much lower, laser beam is more stable and powerful. One standard bottle of helium gas with 12kg pressure can be used for 300 hours.

With Colorful Touch Screen Control Panel, simple and convenient operation.


Laser Source	1900-W	2500-W
Laser wavelength	10.6um	10.6um
Power range	200-1900W	200-2500W
Laser power stability	≤±2%	≤±2%
Working way	Continue/Pulse	Continue/Pulse
Preheat time	6 minutes	6 minutes
Input power	380V±10%	380V±10%

Rotary Cutting Rules



Thickness:4pt/1.42
Arc back:φ150mm to φ600mm
Notch height:16mm to 50mm
The number of teeth/inch:4 to 16

Flat Cutting Rules

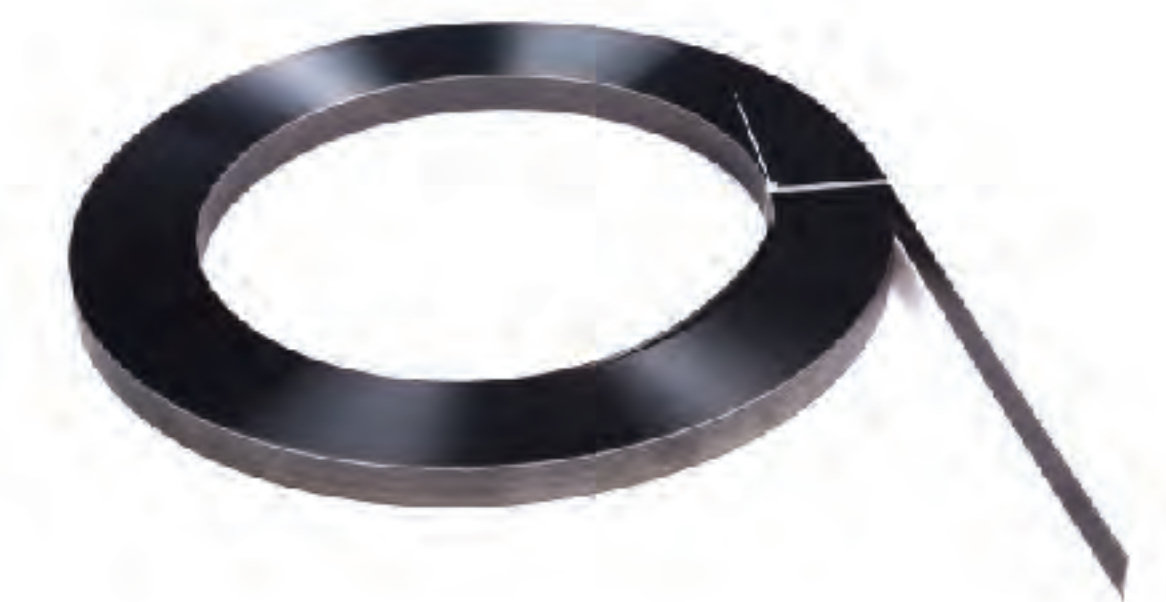

Thickness: 2pt/0.71 3pt/1.07
Height:23.3mm to 50mm
Type of edge: CB、LCB、SB、LSB

Rotary Laser Plywood



Glue:E1
Material:European beech
Moisture Content: 8-12%
Specification:
diameter*thickness*length
φ360*13/15mm*1.8m-3m
φ410*13/15mm*1.8m-3m
φ440*13/15mm*1.8m-3m
φ487*13/15mm*1.8m-3m

Flat Laser Plywood



Material:Birch, poplar
Flatness:good
Specification:
length&width&thickness
1220&1220&9-22mm
1220&1830&9-22mm
1220&2440&9-22mm

Multi-functional Die Making Machine YT-C4



Function	Punching, Lipping, Cutting,
Angle for lipping	$\angle 10^\circ$
Height of Rules	25.4-25.8
Thickness of Rules	1.42 (Need another 2 Pressure roller for curve laser crease CN)
Height of Punching	Height:0-20mm, Width:8mm (Adjustable, width within 15mm can be customized)
Material Feeding	Manual operation
Minimum diameter	$\varnothing 180$
Power	750W
Power supply	220V 50HZ
Additional function	N/A
Cutting Mode	Electric Cutting

Manual Rule Bending Machine YTB-25B/56B




Technical parameters
Rule bending width:
25mm(YTB-25B)/56mm (YTB-56B)
The max thickness blade can be benbed is 1.5mm

Rule Punching Machine YTP-9



Specification: The width of punching hole is 9mm, and other width can be done according to customer requirement. The depth of punching hole is 0-25mm. The max thickness blade can be punching is 2mm.

Cylinder Drum

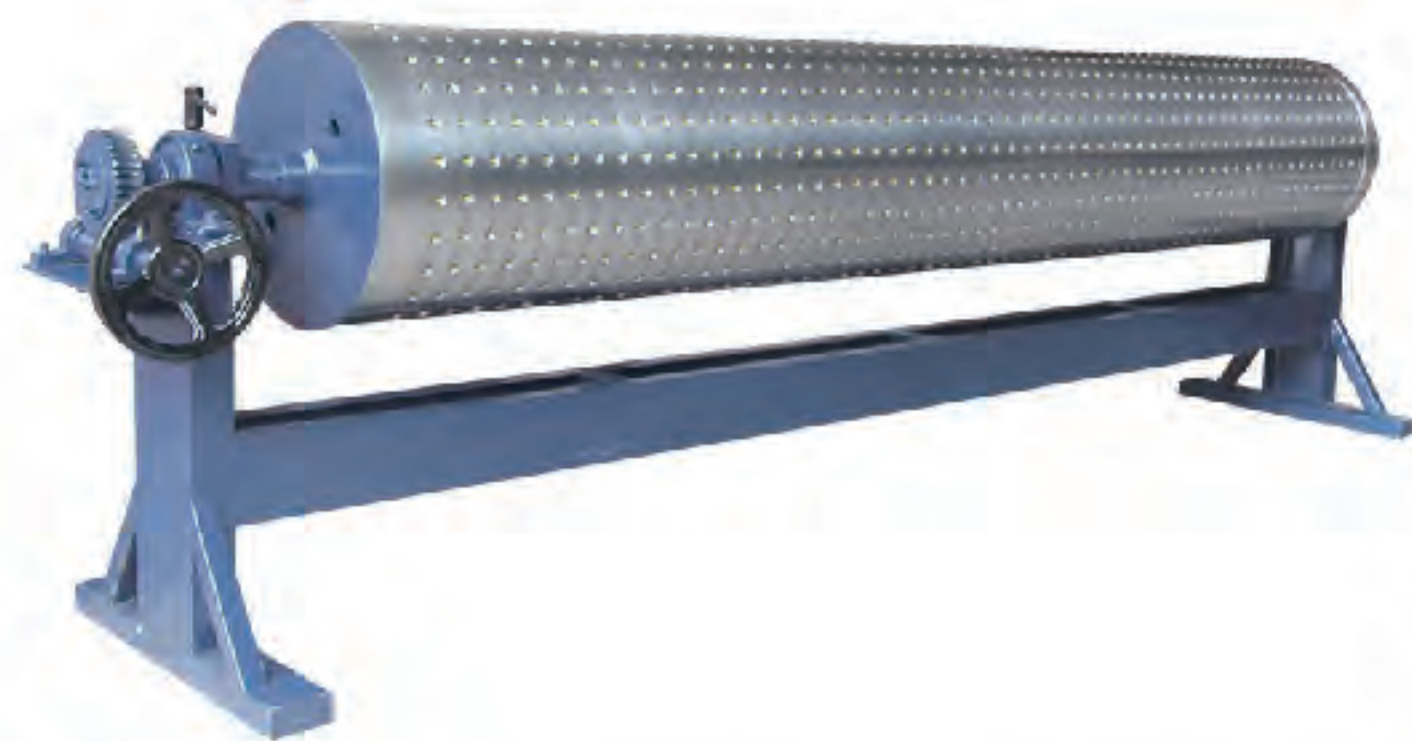

Specification: diameters: $\varnothing 178\text{mm}-\varnothing 750\text{mm}$, and length is 1800mm-5000mm. With band brake and it is equipped with ration operated by hand or electricity.

Screw holes can be done according to customer's requirement; the tolerance of the screw hole is $\pm 0.1\text{mm}$. With the treatment of chrome plated rust. Size tolerance is: screw hole is $\pm 0.1\text{mm}$, and diameter is $\pm 0.05\text{mm}$ and length is $\pm 0.05\text{mm}$.

Precision Manual Bending machine YTB-25M



Technical parameters
Rule bending width:
25mm(YTB-25M) has 40 pcs moulds

Rule Cutting Machine YTJ-56B



Specification:
The tool blade height can be cut is within 56mm, and the thickness of blade is within 1.5mm.

Cutting and Lipping Machine YTLC-40





Specification: the cutting height is 23.8-40mm. Rule thickness can be cut is within 1.5mm and angle can be cut is $15^\circ-42^\circ$

Rotary Jig Saw Machine YTRJ-360/440/487




Curved Bending Machine YTBC-180



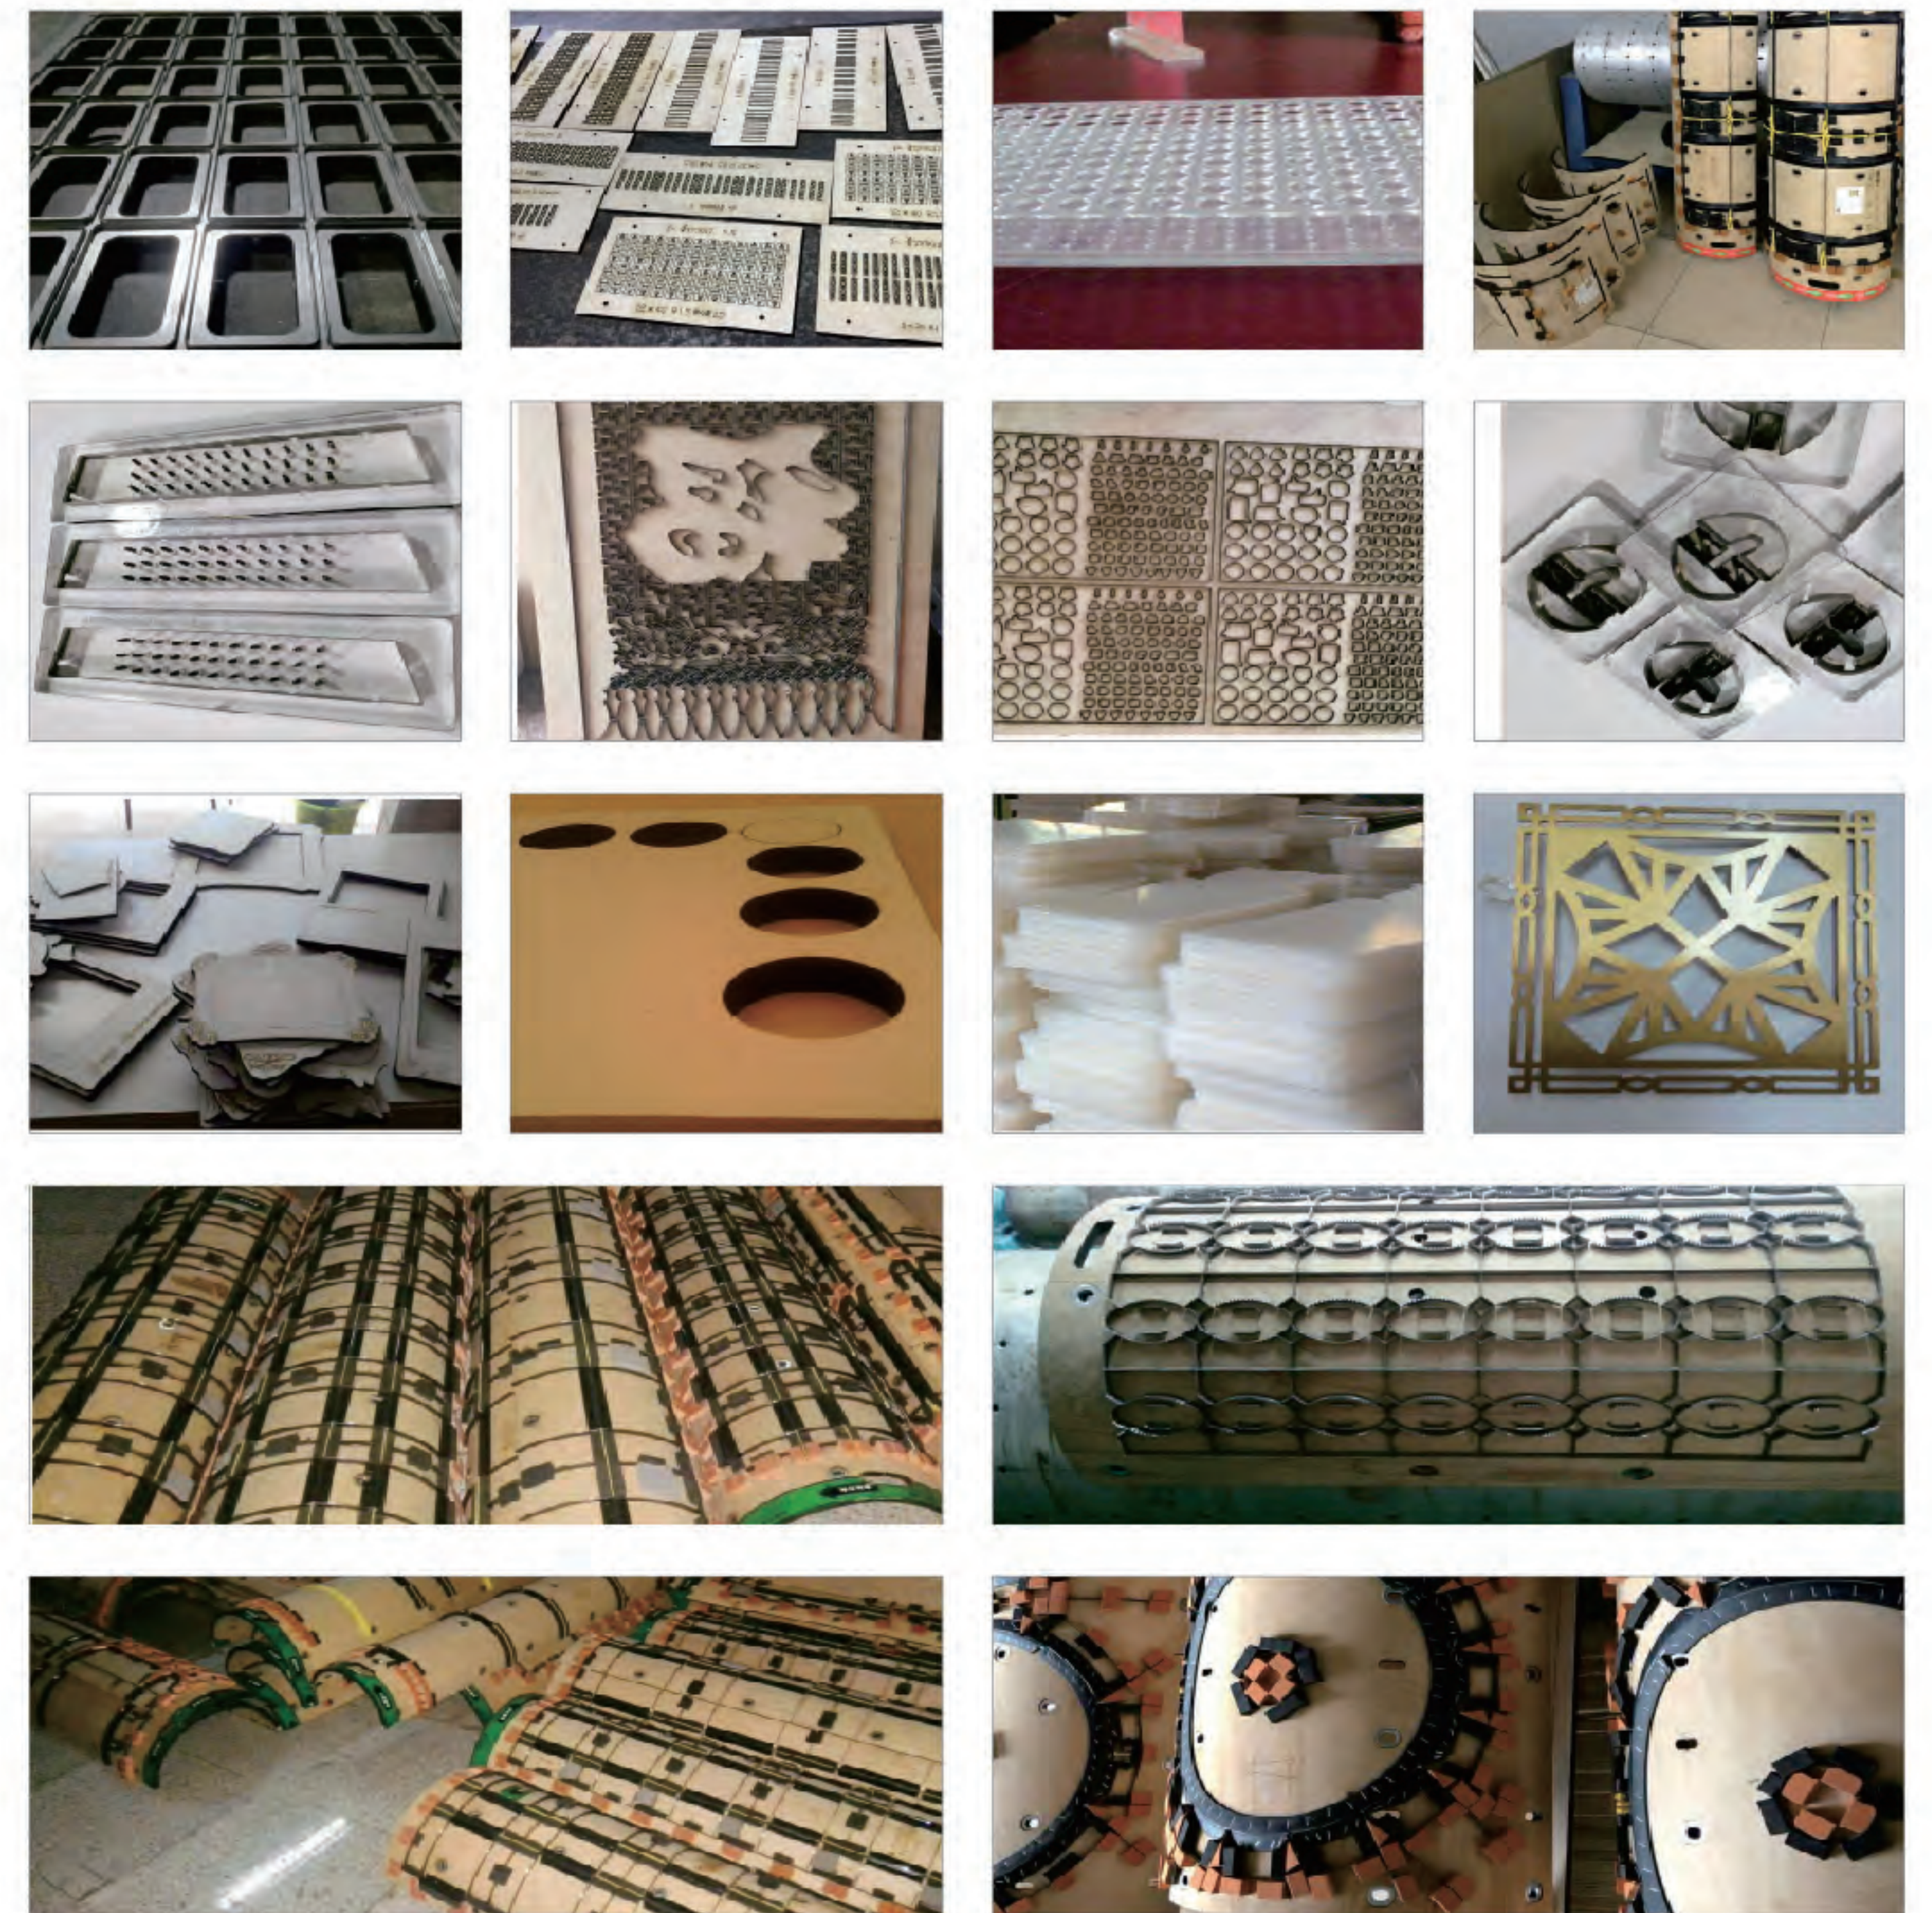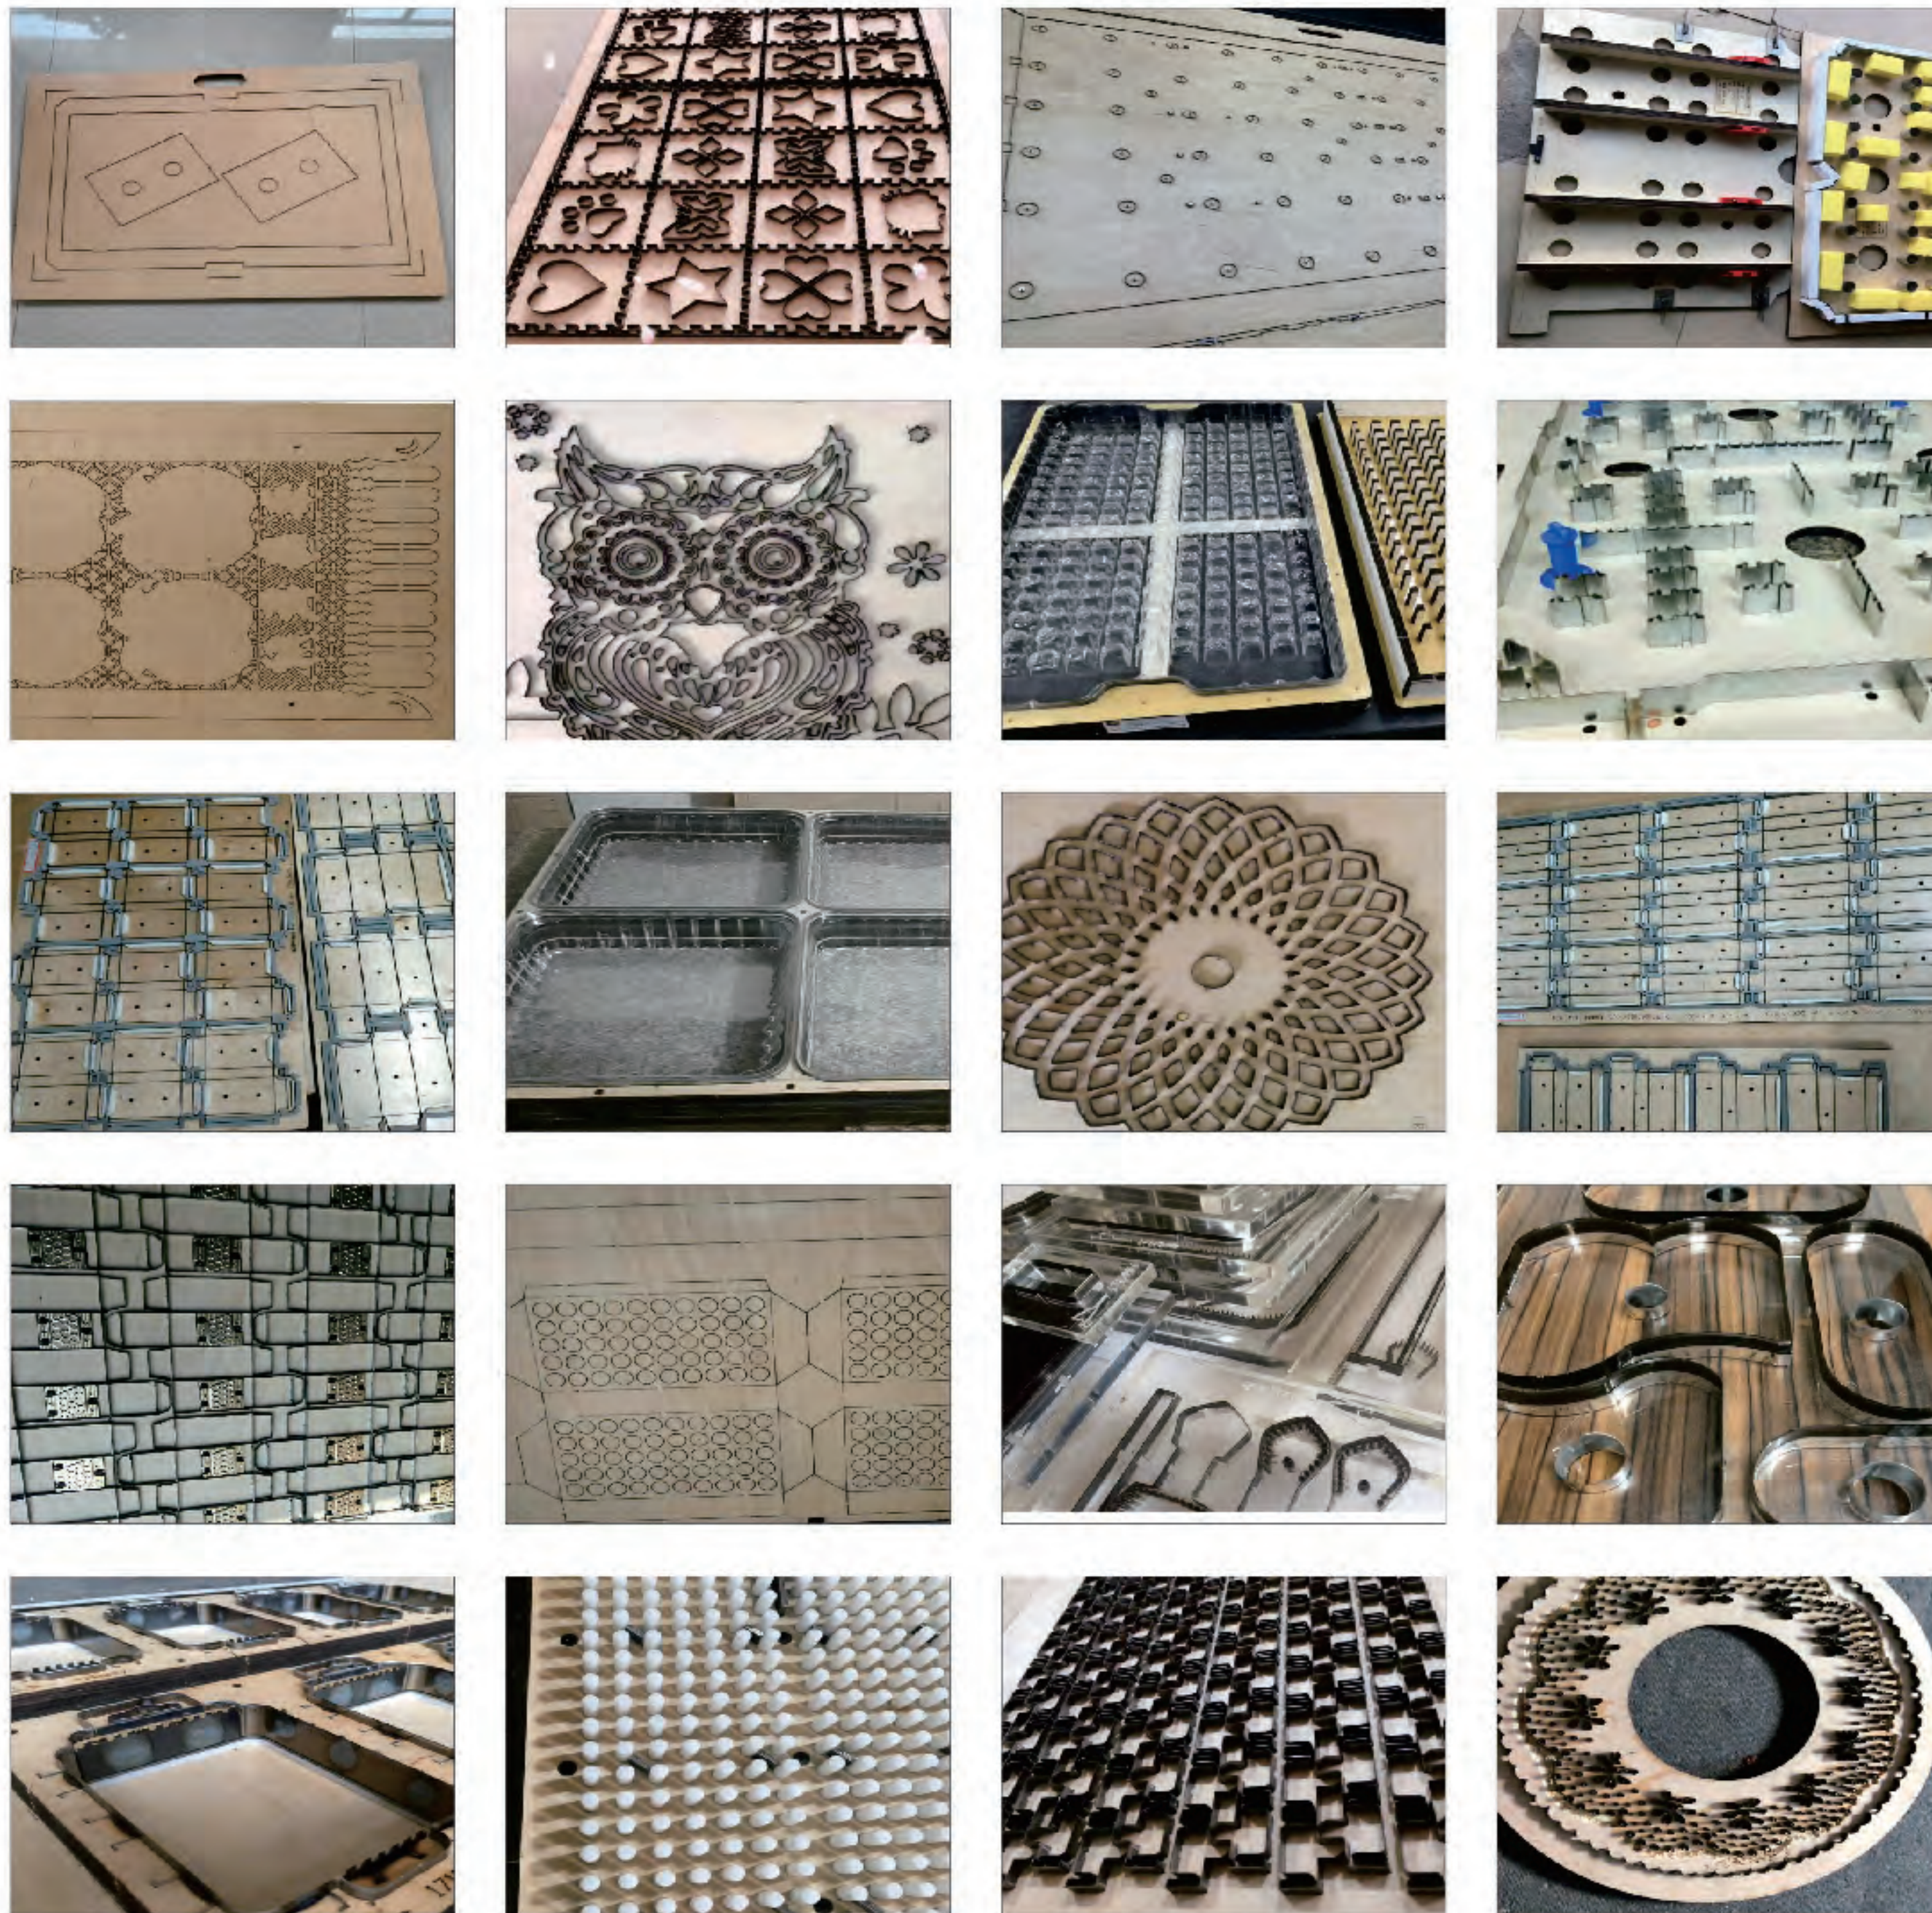

Our Professional Team

Your Success is Our Business

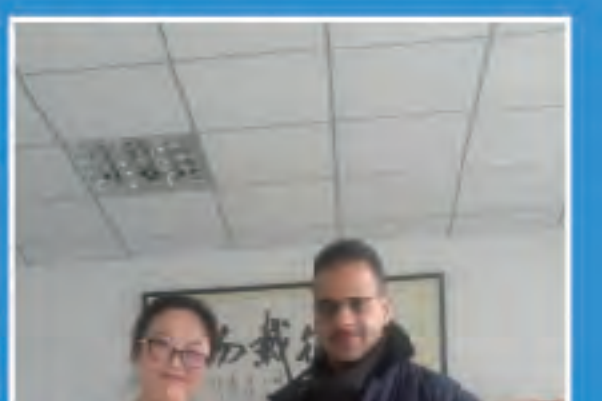

Global Presence&Regional Support



● 12 Distributors

● 10 Product Series

● 38+ Years Experience

● 70+ Countries

● 2000 sets machines

Albania	Brazil	Czech	Malaysia	Philippines	Jordan	Singapore	Uzbekistan
Algeria	Bulgaria	Denmark	Mauritius	Ghana	Kazakhstan	South Africa	Vietnam
Argentina	Cameroon	Ecuador	Mexico	Greece	Kenya	Sri Lanka	Yemen
Armenia	Canada	Egypt	Myanmar	India	Poland	Spain	Zimbabwe
Australia	Chile	El Salvador	Nepal	Indonesia	Portugal	Syria	
Bahrain	Colombia	Estonia	Netherlands	Iran	Romania	Thailand	
Bangladesh	Costa Rica	South Korea	New Zealand	Iraq	Russia	U.A.E	
Belgium	Croatia	Kuwait	Pakistan	Israel	El Salvador	U.K	
Bolivia	Cyprus	Lebanon	Peru	Italy	Saudi Arabia	U.S.A	